


FSM U SERIES are high quality upright cabinets with a choice of door configuration, manufactured with high quality components for long life and reliability and easy to use digital controllers, in a choice of Chiller or Freezer models.

UPRIGHT CHILLER

Features include:

- ▶ High density polyurethane foam insulation.
- ▶ Stainless Steel exterior and interior.
- ▶ Magnetic closing doors with large ergonomic handles
- ▶ High output fan cooling system.
- ▶ Auto-defrosting and digital controller.
- ▶ Self-evaporating drainage system.
- ▶ Door gaskets are easily replaceable.
- ▶ Durable PVC coated shelves and internal round corner edges for easy cleaning.
- ▶ Chiller temp range: +2°C to +5°C.
- ▶ Freezer temp range: -10°C to -18°C.
- ▶ Ambient temperature rated 36°C.
- ▶ Supplied on 100mm dia. castors with 10amp plug.

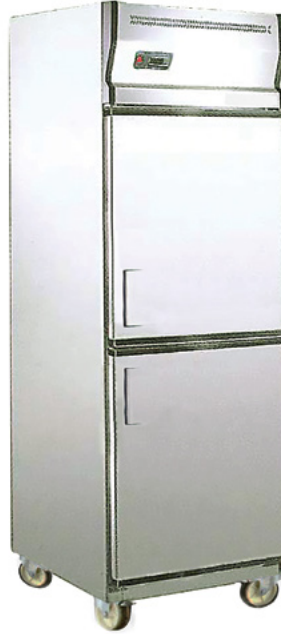

Available in two or four door models,
Chiller or Freezer (see below)

MODEL	DIMENSIONS EXTERNAL	DIMENSIONS INTERNAL	INTERNAL VOLUME	REFRIGERANT	TEMP RANGE oC	COMPRESSOR	VOLTAGE/ AMPS	NET WEIGHT (Kgs)	GROSS WEIGHT (Kgs)	TEMP CONTROL	No. SHELVES
UC2D660	660 x 760 x 2060	540 x 640 x 1460	505L	R134A 380g	+1 to +4	1/4HP	240V 4.3A	97	130	DIGITAL	4
UC4D1300	1300 x 760 x 2060	1180 x 640 x 1460	1103L	R134A 460g	+1 to +4	2/5HP	240V 6.2A	168	200	DIGITAL	8

UPRIGHT FREEZER

MODEL	DIMENSIONS EXTERNAL	DIMENSIONS INTERNAL	INTERNAL VOLUME	REFRIGERANT	TEMP RANGE oC	COMPRESSOR	VOLTAGE/ AMPS	NET WEIGHT (Kgs)	GROSS WEIGHT (Kgs)	TEMP CONTROL	No. SHELVES
UF2D660	660 x 760 x 2060	540 x 640 x 1460	505L	R404A 520g	-10 to -18	1/2HP	240V 4A	102	135	DIGITAL	4
UF4D1300	1300 x 760 x 2060	1180 x 640 x 1460	1103L	R404A 750g	-10 to -18	1HP	240V 5A	165	200	DIGITAL	8