



People who serve, products that solve.™

Flav-R-Savor Holding Cabinets with thermostatically controlled heat and humidity hold hot food at optimum serving temperatures longer than other units that only supply heat.

Extend your holding times considerably and improve the food quality that you ultimately serve as well. Food can be prepared well in advance of peak serving periods.

FLAV-R-SAVOR® HOLDING CABINETS with **HEAT & HUMIDITY** control



PORTABLE MODELS

Convenient and versatile food holding where it's needed. The combination of heat and humidity control ensures longer holding times and better food quality. Features a large digital readout and convenient controls for operator ease. These units are also stackable where space is limited for added versatility. Comes with high visibility tempered glass door for operator convenience and built to last with Hatco quality construction.



FSHC-6W1

Flav-R-Savor Portable Holding Cabinet – Single Door.
Six Adjustable Angle Runners on each side accommodate
6 x Gastronorm 2/1 pans
65 mm deep. (Pans not included).
Low profile – fits under normal kitchen counters.
Dimensions: 645W x 749D x 816H mm
Weight: 79Kg
Electrical: 1.7kw, 7 amp, 10amp plug.



FLAV-R-SAVOR® PORTABLE HOLDING CABINETS

Models FSHC-6W1, FSHC-6W2 FSHC-7-1, FSHC-7-2

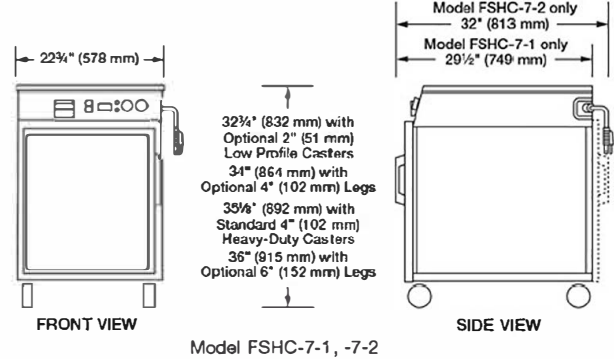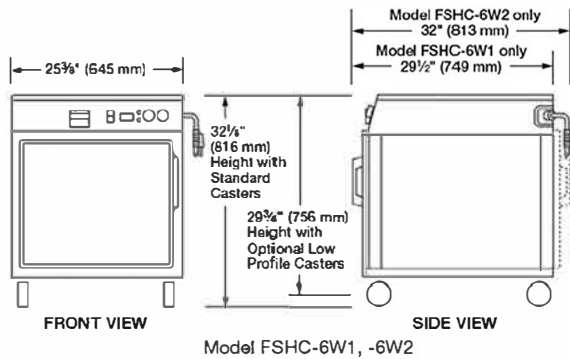

SPECIFICATIONS

Model	Type	Rack Style	Shipping Weight
FSHC-6W1	1 Door	Adjustable Angle Slides*	175 lbs. (79 kg)
FSHC-6W2†	2 Door	Adjustable Angle Slides*	179 lbs. (81 kg)
FSHC-7-1	1 Door	Adjustable Angle Slides*	168 lbs. (76 kg)
FSHC-7-2†	2 Door	Adjustable Angle Slides*	172 lbs. (78 kg)


- * 7 slides on each side. Sheet Pans not included.
- † Two-door pass-through single cabinet, not two units stacked.
- * 6 slides on each side. Sheet Pans not included.

WATER QUALITY REQUIREMENTS

Water supply in excess of 3.0 grains of hardness per gallon (GPG) (.75 grains of hardness per liter) must be treated and softened before being used. Water containing over 3.0 GPG (.75 GPL) will decrease the efficiency and reduce the operating life of the unit.
Note: Product failure caused by liming or sediment buildup is not covered under warranty.

Pan Capacity

Model FSHC-6W1 and -6W2 include stainless steel angle slides which will accommodate six 18" x 26" (457 x 660 mm) sheet pans on 3" (76 mm) centers, eleven 18" x 26" (457 x 660 mm) sheet pans on 1 1/2" (38 mm) centers, or twelve 12" x 20" (305 x 508 mm) food pans (six 2/1 Gastronorm pans) on 3" (76 mm) centers, or eleven 2/1 Gastronorm pans on 1 1/2" (38 mm) centers).



Models FSHC-7-1 and -7-2 include stainless steel angle slides which will accommodate seven 12" x 20" (305 x 508 mm) food pans or 18" x 26" (457 x 660 mm) sheet pans on 3" (76 mm) centers, or fifteen 18" x 26" (457 x 660 mm) sheet pans on 1 1/2" (38 mm) centers with purchase of extra angle slides.

OPTIONS (NOT FOR RETROFIT)

- Designer Colors (Side Panels and Top): Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green
- Stainless Steel Side Panels, Back, and Top (FSHC-7-1, -7-2 only, no back panel on two-door models)
- Stainless Steel Door (In lieu of Glass Door) (FSHC-7-1, -7-2 only)
- 2" (51 mm) Low Profile Casters (In lieu of standard Casters)
- 4" (102 mm) Adjustable Legs (In lieu of standard Casters) (FSHC-7-1, -7-2 only)
- 6" (152 mm) Stainless Steel Legs (In lieu of standard Casters) (FSHC-7-1, -7-2 only)

DIMENSIONS

FSHC-6W1: 25 3/8"W x 29 1/2"D x 32 1/8"H (645 x 749 x 816 mm).
 FSHC-6W2: 25 3/8"W x 32"D x 32 1/8"H (645 x 813 x 816 mm).
 FSHC-7-1: 22 3/4"W x 29 1/2"D x 35 1/4"H (578 x 749 x 895 mm) on 4" (102 mm) Casters.
 FSHC-7-2: 22 3/4"W x 32"D x 35 1/4"H (578 x 813 x 895 mm) on 4" (102 mm) Casters.
 Cabinet Opening: FSHC-6W1, -6W2 – 21 1/2"W x 19"H (546 x 483 mm).
 FSHC-7-1, -7-2 – 18 1/2"W x 22"H (470 x 559 mm).
 Top Surface: FSHC-6W1, -6W2 – 25 3/8"W x 25 7/8"D (645 x 657 mm).
 FSHC-7-1, -7-2 – 22 5/8"W x 25 7/8"D (575 x 657 mm).

VOLTAGE


FSHC-7-1, -7-2: 120 volts, 60 Hz, 1697 watts, 14.1 amps (uses NEMA 5-15P, NEMA 5-20P – Canada).
 FSHC-6W1, -6W2: 120 volts, 60 Hz, 1697 watts, 14.1 amps (uses NEMA 5-15P, NEMA 5-20P – Canada).

Export voltages available.

CORD LOCATION

FSHC-7-1, -7-2: Facing controls, left-hand side panel, bottom right corner.
 FSHC-6W1, -6W2: Back of unit, top right side.

PLUG CONFIGURATIONS

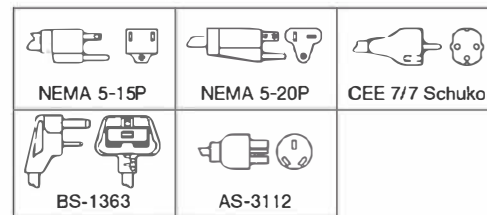

- Available Low-Water Alarm (FSHC-7-1, -2 only)

ACCESSORIES

- Stacking Hardware
- Glo-Ray® Carving Station
- Extra Pan Slides
- Sheet Pans – Full and Half-size