



Freestanding Drawer Warmers - Standard and Narrow

Models: HDW-1, -2, -3, -4
HDW-1N, -2N, -3N

Hold everything from meat, to vegetables, to rolls in the Hatco Drawer Warmer. Each Drawer features adjustable sliding vents and individual thermostatic controls to hold a wide variety of hot foods safely for peak serving periods.

Standard features

- Available in narrow and standard widths
- Each drawer has a recessed individual thermostatic control, temperature monitor, and On/Off switch
- Heavy-duty drawer slides with nylon rollers
- Adjustable sliding vents on each drawer
- The pan supplied with each drawer lifts straight out of standard width Drawer Warmers, 20.75" x 12.75" x 6" (527 x 324 x 152 mm)
- Completely insulated individual cavities provide maximum energy efficiency
- Unit comes with a 6' (1829 mm) cord and plug
- Anti-tip bracket with hardware or deck mount legs included

Project _____

Item # _____

Quantity _____



Options (available at time of purchase only)

Designer Color for Drawer Front – Stainless Steel Standard – Non-standards colors are non-returnable

- Warm Red
- Black
- Gray Granite
- White Granite
- Navy Blue
- Hunter Green
- Antique Copper

- Touchscreen display control panel (TTC)
- Oversized Drawer Frame and Pan 20" x 15" x 5" (508 x 381 x 127 mm) (Standard width models only)
- Biscuit Pan Drawer (Accommodates two 18" x 13" (457 x 330 mm) Half-size Sheet Pans (Standard width models only)
- Chip Guard (HDW-1, 2, 3 or 4 models only)

Accessories


- Custom trivet raises food product .5" (13 mm) off bottom of full size pan 17.5" x 9.5" x .5" (445 x 242 x 13 mm)
- 6" (152 mm) Stainless Steel Adjustable Legs
- 2" (51 mm) Diameter casters - all swivel, 2 lock - adds 2.5" (64 mm) to height (1-, 2-, or 3-drawer models)
- 3" (76 mm) Diameter Locking Casters - adds 4.25" (108 mm) to height (1-, 2-, or 3-drawer models)
- 5" (127 mm) Diameter Locking Casters – adds 6.25" (159 mm) to height (1-, 2-, 3-, or 4-drawer models)
- Water/Spillage Pan – one per drawer (excludes BIS Drawer and OS-Pan Options)
- Splash Baffle – one per drawer, Water/Spillage Pan creates humidified environment (excludes BIS Drawer and OS-Pan Options)
- Stainless Steel Food Pans



Freestanding Drawer Warmers - Standard and Narrow

Models: HDW-1, -2, -3, -4 HDW-1N, -2N, -3N

HDW-x, HDW-xN

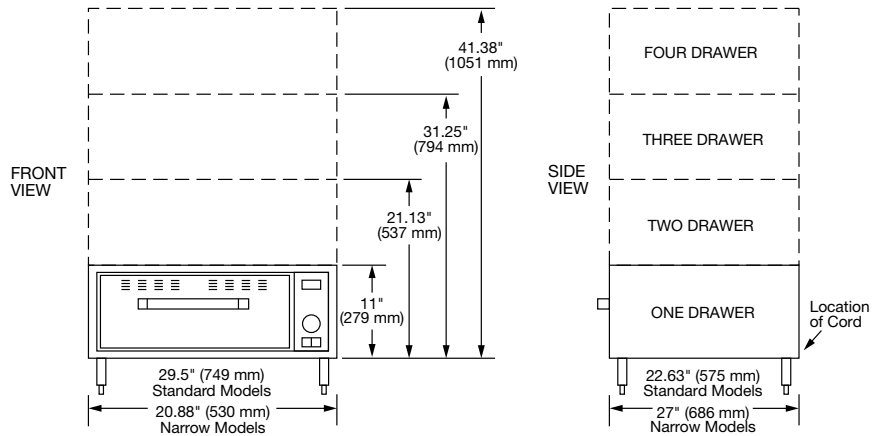

SPECIFICATIONS Freestanding Drawer Warmers Standard and Narrow

The shaded areas contain electrical information for International models only

Model	Dimensions † (Width x Depth x Height)	Volts	Phase	Watts	Amps	Plug	Approx. Ship Weight	
HDW-1 HDW-1N	29.5" x 22.63" x 11" (749 x 575 x 279 mm) 20.88" x 27" x 11" (530 x 686 x 279 mm)	100	Single	450	4.5	JIS C 8303	97 lbs. (44 kg)	
		120			3.8	NEMA 5-15P		
		208			2.2	NEMA 6-15P		
		240	1.9					
		220	Single	450	2.0	CEE 7/7 Schuko		
		240			1.9	BS-1363		
		220-230 (CE)			450-492	2.0-2.1		CEE 7/7 Schuko
230-240 (CE)	413-450	1.8-1.9			BS-1363			
HDW-2 HDW-2N	29.5" x 22.63" x 21.13" (749 x 575 x 537 mm) 20.88" x 27" x 21.13" (530 x 686 x 537 mm)	100	Single	900	9.0	JIS C 8303	168 lbs. (76 kg)	
		120			7.5	NEMA 5-15P		
		208			4.3	NEMA 6-15P		
		240	3.8					
		220	Single	900	4.1	CEE 7/7 Schuko		
		240			3.8	BS-1363		
		220-230 (CE)			900-984	4.1-4.3		CEE 7/7 Schuko
230-240 (CE)	826-900	3.6-3.8			BS-1363			
HDW-3 HDW-3N	29.5" x 22.63" x 31.25" (749 x 575 x 794 mm) 20.88" x 27" x 31.25" (530 x 686 x 794 mm)	100	Single	1350	13.5	JIS C 8303	232 lbs. (106 kg)	
		120			11.3	NEMA 5-15P		
		208			6.5	NEMA 6-15P		
		240	5.6					
		220	Single	1350	6.1	CEE 7/7 Schuko		
		240			5.6	BS-1363		
		220-230 (CE)			1350-1476	6.1-6.4		CEE 7/7 Schuko
230-240 (CE)	1239-1350	5.4-5.6			BS-1363			
HDW-4*	29.5" x 22.63" x 41.38" (749 x 575 x 1051 mm)	120	Single	1800	15	NEMA 5-15P	296 lbs. (135 kg)	
		208			8.7	NEMA 6-15P		
		240			7.5			
		220	Single	1800	8.2	CEE 7/7 Schuko		
		240			7.5	BS-1363		
		220-230 (CE)			1800-1968	8.2-8.6		CEE 7/7 Schuko
		230-240 (CE)			1653-1800	7.2-7.5		BS-1363

* Not available for Canada. † Height does not include legs/casters, also, add 1.25" (32 mm) to depth for drawer handle.

CORD LOCATION

Back of unit, lower left corner.

PLUG CONFIGURATIONS

