

The SP Peelers from IMC are amongst the fastest potato peelers on the market, offering you all the flavour of freshly peeled potatoes, with the speed and convenience of pre-prepared products.

The peelers feature a compact footprint - even the 25kg model takes up a tiny amount of your floor space. And with the SP Peelers being safe and simple to use, you will also minimise your staff time.

And not only are these peelers the easiest and quickest to clean, they're also built to last, with exceptional durability and outstanding reliability.

So what you could spend on pre-prepared potatoes in the short term, you can invest in a peeler that will work for you for the long term.

MORE FLEXIBLE

With a choice of pedestal heights to fit a tank or catering sink, a flexible hose or plumbed-in waste outlet on either side and the option of an integrated filter basket, an SP Peeler fits easily into your working environment.



SP12H
Model F58/903 -
300Kg/Hr capacity



SP25H
Model F58/913 -
600Kg/Hr capacity

SP12H MODEL - CAPACITY 12KG

Includes timer function, suitable for up to 300kg /hr
All stainless steel construction.
Four different discharge positions
Dimensions: 1400 H x 530W x 624Dmm
415V 1/2HP 3 PHASE 0.37Kw
Weight: 52Kg

SP25H MODEL - CAPACITY 25KG

Includes timer function, suitable for up to 600kg /hr
All stainless steel construction.
Four different discharge positions
Dimensions: 1360 H x 564W x 725Dmm
415V 1HP 3 PHASE 0.75Kw
Weight: 65Kg

Single phase is available on application - call for further details

HEAD OFFICE:

21-23 Agosta Drive, Laverton North,
Vic. 3026 Australia
T: +61 3 9368 2300 F: +61 3 9369 3800
E: sales@fsm-pl.com.au W: www.fsm-pl.com.au

SYDNEY OFFICE:

Unit 15, 7-9 Progress Circuit,
Prestons, NSW 2170
T: +61 2 9608 8620 F: +61 2 9607 9370
E: sales@fsm-pl.com.au W: www.fsm-pl.com.au


QUEENSLAND OFFICE:

4/40 Rivergate Place,
Murarrie, QLD 4172
T: +61 7 3390 4185 F: +61 7 3393 9508
E: sales@fsm-pl.com.au W: www.fsm-pl.com.au


PERTH:

T: 0413 893 311
E: sales@fsm-pl.com.au
W: www.fsm-pl.com.au

SPECIFICATIONS IMC SP SERIES PEELERS

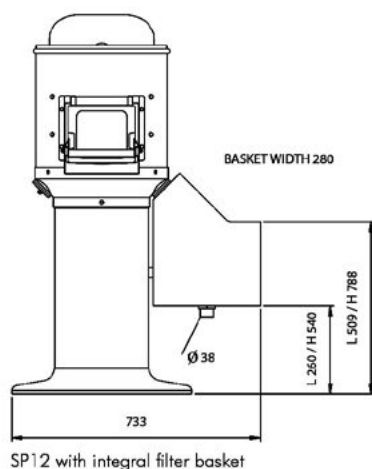

SP12	
General	
Mounting	Floor-mounted with low or high pedestal
Capacity	12kg (28lb)
Output	300kg/hour
Dimensions (h x w x d)	low pedestal 1120mm x 530mm x 624mm high pedestal 1400mm x 530mm x 624mm
Discharge height	low pedestal 650mm high pedestal 930mm
Electrical information	
Motor	0.37kW (0.5HP)
Operator controls	Control box (fixed to wall bracket) with on/off button(s), timer and continual run settings.
Installation information	
General	A level floor area 530mm x 624mm
Water connection	WRAS approved water inlet hose and airbreak supplied. Connect to an adjacent cold water supply.
Waste water outlet connection	1m long 75mm flexible waste pipe supplied for discharge into waste gully or floor standing interceptor tank. Can also be plumbed into waste using 2" BSP waste pipe connection.
Electrical connection	3 phase to be wired into fused isolator switch.
Shipping specification	
Packing dimensions (h x w x d)	low pedestal 1200mm x 560mm x 670mm high pedestal 1480mm x 560mm x 670mm
Packing volume	low pedestal 0.450m ³ high pedestal 0.555m ³
Packing weight (gross/net)	63.5kg/51 kg

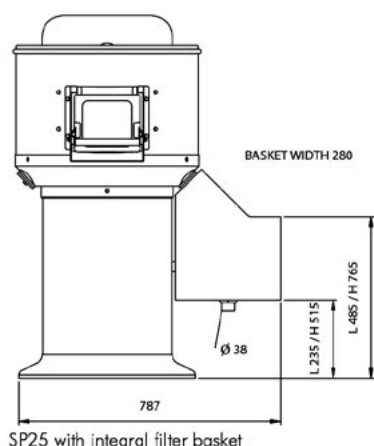

SP25	
General	
Mounting	Floor-mounted with low or high pedestal
Capacity	25kg (56lb)
Output	600kg/hour
Dimensions (h x w x d)	low pedestal 1080mm x 564mm x 725mm high pedestal 1360mm x 564mm x 725mm
Discharge height	low pedestal 650mm high pedestal 930mm
Electrical information	
Motor	0.75kW (1.0HP)
Operator controls	Control box (fixed to wall bracket) with on/off button(s), timer and continual run settings.
Installation information	
General	A level floor area 565mm x 725mm
Water connection	WRAS approved water inlet hose and air break supplied. Connect to an adjacent cold water supply.
Waste water outlet connection	1m long 75mm flexible waste pipe supplied for discharge into waste gully or floor standing interceptor tank. Can also be plumbed into waste using 2" BSP waste pipe connection.
Electrical connection	2.5m mains cable supplied with 13 amp plug for single phase. 3 phase to be wired into fused isolator switch.
Shipping specification	
Packing dimensions (h x w x d)	low pedestal 1200mm x 640mm x 790mm high pedestal 1480mm x 640mm x 790mm
Packing volume	low pedestal 0.607m ³ high pedestal 0.748m ³
Packing weight (gross/net)	80kg/64.5kg

Please note:

Capacities are approximate and output may vary depending on the type and age of potatoes used.

Due to our policy of continual product development and improvement, all details and specification are subject to change without notice

FSM (FOOD SERVICE MACHINERY PTY. LTD.)

HEAD OFFICE:

21-23 Agosta Drive, Laverton North,
Vic. 3026 Australia
T: +61 3 9368 2300 F: +61 3 9369 3800
E: sales@fsm-pl.com.au W: www.fsm-pl.com.au

SYDNEY OFFICE:

Unit 15, 7-9 Progress Circuit,
Prestons, NSW 2170
T: +61 2 9608 8620 F: +61 2 9607 9370
E: sales@fsm-pl.com.au W: www.fsm-pl.com.au

QUEENSLAND OFFICE:

4/40 Rivergate Place,
Murarrie, QLD 4172
T: +61 7 3390 4185 F: +61 7 3393 9508
E: sales@fsm-pl.com.au W: www.fsm-pl.com.au

PERTH:

T: 0413 893 311
E: sales@fsm-pl.com.au
W: www.fsm-pl.com.au