



Project _____

Item # _____

Quantity _____

3CS Sanitizing Sink Heaters

Models: 3CS-3, -4, -6, -9,
3CS-3B, -4B, -6B, -9B

The Hatco 3CS Sanitizing Sink Heater makes manual warewashing faster and more convenient. Designed to fit under the center of the sink, it maintains a continuous supply of sanitizing rinse water without taking up valuable sink space.

Standard features

- Perfect for 3- or 4-compartment sinks, pot and pan sinks and bar sinks
- Stainless steel front, powdercoated / silver-gray hammertone body and convenient side drain
- Equipped with an Energy Cut-Off (ECO) for built-in protection against higher-than-normal water temperature
- Power On/Off toggle switch activates the heater, and a yellow light indicates when power is on
- A red light is an overtemp indicator pointing out the need to refill unit with water and reset
- Meets NSF Standard of 180°F (82°C) for dish sanitizing
- Shipped ready to install with all gaskets and fittings, as well as a five-year limited warranty



3CS-9 with optional temperature monitor

Options (available at time of purchase only)

- All Stainless Steel Body and Base
- Temperature Monitor (Built-in) (Not available with Light)
- Temperature Light (Not available with Monitor)
- CSA Wiring (Canada only)
- Security Package (Torx® Screws and Control Cover)
- 480 Volt
- Shipboard use

Accessories

- Flush Kit (Flush Hose, Stopper and Adapter)



IFS anti-microbial coatings use naturally-occurring, environmentally sustainable, silver ions to help inhibit the growth of microbes on the powder coated surface. See www.hatcocorp.com/antimicrobial-paint for more information.



For operation, location and safety information, please refer to the Installation and Operating Manual.





3CS Sanitizing Sink Heaters

Models: 3CS-3, -4, -6, -9, 3CS-3B, -4B, -6B, -9B

SPECIFICATIONS 3CS Sanitizing Sink Heaters

The shaded areas contain electrical information for International models only

| Model | Sink Area | Voltage 50/60Hz | kW | Phase | Amps | Wiring Sizing AWG [†] | Fuse or Circuit Breaker [‡] | Approx. Ship Weight | |
|--------|--------------------------|--------------------|-------------|--------------------|----------------|--------------------------------|---|------------------------|-----------------|
| 3CS-3 | 15" (381 mm) Sq. or less | 208 | 3.0 | Single | 14.4 | 12 | 20 | 24 lbs. (11 kg) | |
| | | 240 | | | 12.5 | | | | |
| | | 480 | | | 6.3 | 14 | 15 | | |
| | | 220-230-240 | 2.5-2.8-3.0 | Single | 11.5-12.0-12.5 | 12 | 20 | | 24 lbs. (11 kg) |
| 3CS-4 | 16"-18" (406-457 mm) Sq. | 208 | 4.5 | Single | 22 | 10 | 30 | 24 lbs. (11 kg) | |
| | | 240 | | | 18.8 | | | | |
| | | 480 | 4.5 | Three ^Δ | 9.4 | 14 | 15 | | |
| | | 220-230-240 | 3.8-4.1-4.5 | Three ^Δ | 17.2-18.0-18.8 | 10 | 30 | | 24 lbs. (11 kg) |
| | | 380-400-415 | 3.8-4.1-4.5 | | 9.9-10.4-10.8 | 14 | 15 | | |
| 3CS-6 | 19"-21" (483-533 mm) Sq. | 208 | 6.0 | Single | 29 | 8 | 40 | 26 lbs. (12 kg) | |
| | | 240 | | | 25 | | | | |
| | | 480 | | | 12.5 | 12 | 20 | | |
| | | 220-230-240 | 5.0-5.5-6.0 | Single | 23-24-25 | 8 | 40 | | 26 lbs. (12 kg) |
| | | 208 | 6.0 | Three ^Δ | 25 | 8 | 40 | 26 lbs. (12 kg) | |
| | | 240 | | | 21.7 | | | | 10 |
| | | 480 | | | 10.8 | 14 | 15 | | |
| | | 380-400-415 | 5.6-6.3-6.7 | Three ^Δ | 14.8-15.6-16.2 | 12 | 20 | | 27 lbs. (12 kg) |
| 3CS-9 | 21"-25" (533-635 mm) Sq. | 208 | 9.0 | Single | 43.3 | 4 | 60 | 27 lbs. (12 kg) | |
| | | 240 | | | 37.5 | 6 | 50 | | |
| | | 480 | | | 18.8 | 10 | 30 | | |
| | | 208 | 9.0 | Three ^Δ | 37.5 | 6 | 50 | 27 lbs. (12 kg) | |
| | | 240 | | | 32.5 | 8 | 40 | | |
| | | 480 | | | 16.2 | 12 | 20 | | |
| 3CS-3B | 15" (381 mm) Sq. or less | 208 | 3.0 | Three (Bal.) | 8.3 | 14 | 15 | 30 lbs. (14 kg) | |
| | | 240 | | | 7.2 | | | | |
| | | 480 | | | 3.6 | | | | |
| | | 380-400-415 | 2.8-3.1-3.4 | Three (Bal.) | 4.3-4.5-4.7 | 14 | 15 | | 30 lbs. (14 kg) |
| 3CS-4B | 16"-18" (406-457 mm) Sq. | 208 | 4.5 | Three (Bal.) | 12.5 | 12 | 20 | 30 lbs. (14 kg) | |
| | | 240 | | | 10.8 | | | | |
| | | 480 | | | 5.4 | | | | |
| | | 380-400-415 | 3.8-4.1-4.5 | Three (Bal.) | 5.7-6.0-6.2 | 14 | 15 | | 30 lbs. (14 kg) |
| 3CS-6B | 19"-21" (483-533 mm) Sq. | 208 | 6.0 | Three (Bal.) | 18.8 | 10 | 30 | 30 lbs. (14 kg) | |
| | | 240 | | | 14.4 | 12 | 20 | | |
| | | 480 | | | 7.2 | 14 | 15 | | |
| | | 380-400-415 | 5.6-6.3-6.7 | Three (Bal.) | 8.6-9.0-9.4 | 14 | 15 | | 30 lbs. (14 kg) |
| 3CS-9B | 21"-25" (533-635 mm) Sq. | 208 | 9.0 | Three (Bal.) | 25 | 10 | 40 | 33 lbs. (15 kg) | |
| | | 240 | | | 21.7 | | 30 | | |
| | | 480 | | | 10.8 | 14 | 15 | | |
| | | 440 | 9.0 | Three (Bal.) | 11.8 | 15 | 15 | | 33 lbs. (15 kg) |
| | | 380-400-415 | 7.5-8.3-9.0 | | 11.4-12.0-12.5 | 12 | 20 | | |

[‡] Wire size is based on THHN wire for branch circuit protection at 0.91 derate factor. Circuit breakers and fused disconnects are to be mounted remote and wired by contractor. Sizes are based on the 2002 NEC table 310-16. Conduit size based on conductors plus ground wire sizing per Table C1 from Appendix C.


[†] Based upon THHN wire rated 90°C.

^Δ Open Delta—standard construction (Amperage higher than Balanced 3-phase).



3CS Sanitizing Sink Heaters

Models: 3CS-3, -4, -6, -9, 3CS-3B, -4B, -6B, -9B

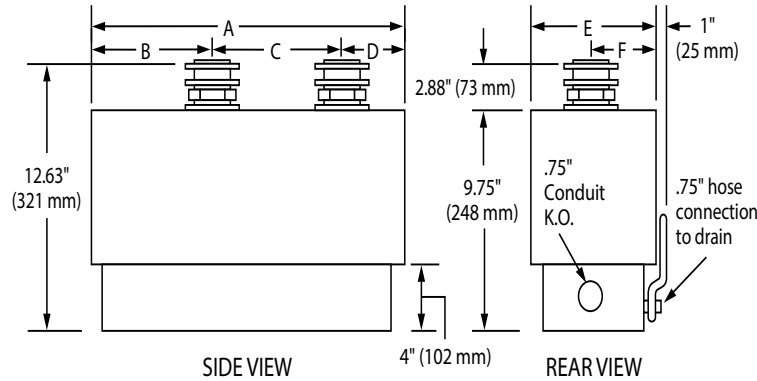

Dimensions

| Model | A | B | C | D | E | F |
|--------------------------------------|-----------------|----------------|---------------|---------------|----------------|---------------|
| 3CS-3, -4, -6, -9 (1- or 3-Phase) | 16.88" (429 mm) | 5.5" (140 mm) | 8.5" (216 mm) | 2.88" (73 mm) | 6.75" (171 mm) | 3.38" (86 mm) |
| 3CS-9 480V (1- or 3-Phase) | 17.13" (435 mm) | 4.63" (117 mm) | 8.5" (216 mm) | 4" (102 mm) | 8" (203 mm) | 4" (102 mm) |
| 3CS-3B, -4B, -6B, -9B (Bal. 3-Phase) | 17.13" (435 mm) | 4.63" (117 mm) | 8.5" (216 mm) | 4" (102 mm) | 8" (203 mm) | 4" (102 mm) |

SIZING INFORMATION

For a Sink Heater: MINIMUM 2000 WATTS (2.2 WATTS PER SQUARE CM) PER SQUARE FOOT of vessel top.

3CS Sink Heaters are sized based on 140°F supply water with a 30 minute preheat period to reach the sanitizing temperature. Sink Heaters are mounted into the third compartment sink with standard plumbing fittings provided. Two 2" diameter holes are required for these fittings and a full size template is provided to locate holes in the sink. The 3CS Sink Heater is easily attached to the plumbing fittings with self-contained unions.

WATER QUALITY REQUIREMENTS

Incoming water in excess of 3.0 grains of hardness per gallon (GPG) (.75 grains of hardness per liter) must be treated and softened before being supplied to hot water dispenser(s). Water containing over 3.0 GPG (.75 GPL) will decrease efficiency and reduce the operating life of the unit.

Note: Product failure caused by liming or sediment buildup is not covered under warranty.

