


UPRIGHT CHILLER

Features include:

- ▶ High density polyurethane foam insulation.
- ▶ Stainless Steel exterior and interior.
- ▶ Magnetic closing doors with large ergonomic handles
- ▶ High output fan cooling system.
- ▶ Auto-defrosting and digital controller.
- ▶ Self-evaporating drainage system.
- ▶ Door gaskets are easily replaceable.
- ▶ Durable PVC coated shelves and internal round corner edges for easy cleaning.
- ▶ Chiller temp range: +2°C to +5°C.
- ▶ Freezer temp range: -10°C to -18°C.
- ▶ Ambient temperature rated 36°C.
- ▶ Supplied on 100mm dia. castors with 10amp plug.

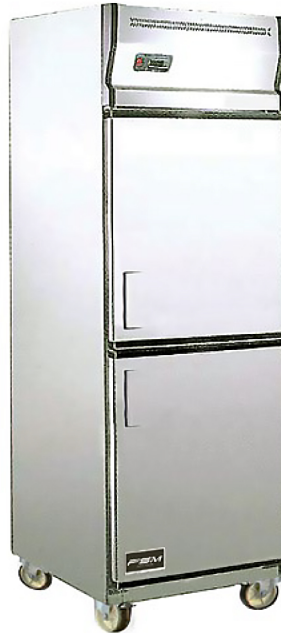

Available in two or four door models,
Chiller or Freezer (see below)

| MODEL | DIMENSIONS EXTERNAL | DIMENSIONS INTERNAL | INTERNAL VOLUME | REFRIGERANT | TEMP RANGE °C | COMPRESSOR | VOLTAGE/ AMPS | NET WEIGHT (Kgs) | GROSS WEIGHT (Kgs) | TEMP CONTROL | No. SHELVES |
|----------|---------------------|---------------------|-----------------|-------------|---------------|------------|---------------|------------------|--------------------|--------------|-------------|
| UC2D660 | 660 x 760 x 2060 | 540 x 640 x 1460 | 505L | R134A 380g | +1 to +4 | 1/4HP | 240V 4.3A | 97 | 130 | DIGITAL | 4 |
| UC4D1300 | 1300 x 760 x 2060 | 1180 x 640 x 1460 | 1103L | R134A 460g | +1 to +4 | 2/5HP | 240V 6.2A | 168 | 200 | DIGITAL | 8 |

UPRIGHT FREEZER

| MODEL | DIMENSIONS EXTERNAL | DIMENSIONS INTERNAL | INTERNAL VOLUME | REFRIGERANT | TEMP RANGE °C | COMPRESSOR | VOLTAGE/ AMPS | NET WEIGHT (Kgs) | GROSS WEIGHT (Kgs) | TEMP CONTROL | No. SHELVES |
|----------|---------------------|---------------------|-----------------|-------------|---------------|------------|---------------|------------------|--------------------|--------------|-------------|
| UF2D660 | 660 x 760 x 2060 | 540 x 640 x 1460 | 505L | R404A 520g | -10 to -18 | 1/2HP | 240V 4A | 102 | 135 | DIGITAL | 4 |
| UF4D1300 | 1300 x 760 x 2060 | 1180 x 640 x 1460 | 1103L | R404A 750g | -10 to -18 | 1HP | 240V 5A | 165 | 200 | DIGITAL | 8 |