


ACQUA LINE

New Generation Tapware

Replacement parts indicated in Red

AQD3300CB AQD3180CB, Deck Mount Faucets

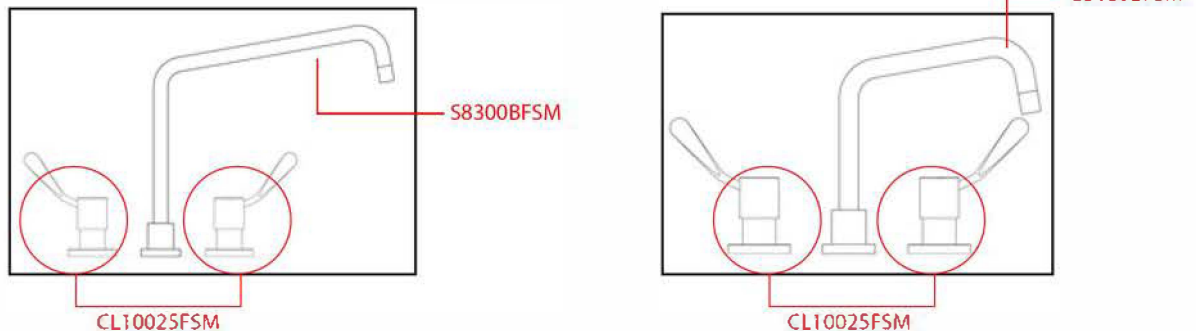

INSTALLATION INSTRUCTIONS

1. Using supplied Kinco nuts and olives, connect T-piece to basin bodies and tighten.
2. Position T-piece and basin bodies through the holes with a clear washer below AND above the basin/sink.
3. Holding the T-piece in place, drop the flange over the protruding SBA cartridge and screw the chrome cover onto to the spindle. The chrome cover is adjustable and can be used in either direction to suit the basin/sink thickness.
4. Place the handle over the spindle and then the washer and grub screw (supplied) and tighten until handle is firm and can be turned easily without wobbling.
5. Use the required coloured indicator (red, blue and supplied) and fit over the grub screw until it sits flush on the handle.
6. Screw the spout tightly onto extruding T-piece

7. CUTOUT DIMENSIONS:

AQD3300CB & AQD3180CB - 22mm spouts & taps

IMPORTANT NOTE:

We do not recommend dismantling the internal parts of the mixer. The mixers are individually factory assembled and tested to give the best performance.

GENERAL INFORMATION

Acqualine Products come with guarantees that cannot be excluded under the Australian Consumer Law. If the problem is deemed to be a product fault, product will be repaired or replaced at our discretion.

NOTE: Failure to comply with the following will void all warranty:

- During the warranty period, we will replace/repair the mixer free of charge. SEE DETAILS BELOW.
- The warranty is extended to the purchaser only and is not transferable.
- All mixers should be installed with isolating stop valves.
- Use only suitable agents to clean the surface of your mixer (ie mild detergent and cloth. No abrasive cleaners).
- The mixer must be installed by a licensed plumber.
- If the incoming water pressure exceeds 500KPa, an approved limiting valve must be fitted.

All new connections must be flushed prior to the connection.

- Approved operating temperature is not to exceed 80°C
- Water Saving Devices maybe required.
- Minimum Operating Pressure 150KPa. Maximum Operating Pressure 350KPa.

STANDARD/ COMPLIANCES

Instal Acqualine tapware in confidence, all Acqualine products are tested to AS/NZS3718, AS4020 and AS/NZS6400 and comply with Australian regulations.

FSM
Excellence since 1976

For all service, warranty or spare parts requirements, please call

03 9368 2300