



CTS-Series Mini Slim-Line Vertical Contact Toaster

Introducing Prince Castle's CTS Mini Slim-Line Vertical Contact Toaster. A revolutionary new design that increases toasting versatility, maximizes space savings, and provides perfect caramelization with the convenience of vertical contact toasting.

Prince Castle's unique two-level platen design allows the operators to toast thicker bun crowns and thinner bun heels at the same time. The variable speed motor is adjustable to allow for toasting speeds up to 2200 buns per hour.

The Prince Castle Advantage:

- Slim-Line design saves up to 30% more counter space
- Adjustable toast times from 9-40 seconds to customize products
- Digital display and electronic controls make for precise and repeatable settings
- Available in three conveyor options: wire, silicone, and stainless steel pleated belt
- Simple to remove conveyor makes cleaning quick and easy
- Dual compression adjustment knobs allow for maximum product flexibility
- Accommodates all buns up to 5.5" in diameter
- Heat Shield for cooler surfaces ensuring safer operation
- Durable stainless steel construction makes the product easy-to-clean and maintain

All Prince Castle Slim-Line Toasters come equipped with our Release Sheet Kit consisting of a Stainless Steel Clamp and Two Non-Stick Teflon Sheets to protect against bun sticking.



A Marmon / Berkshire Hathaway Company


© 2018 Prince Castle LLC - Specifications and design are subject to change without notice

This product is patent protected. Patent information can be found at www.princecastle.com/patents/.

12/2018



Contact Us
1-800-722-7853
www.princecastle.com

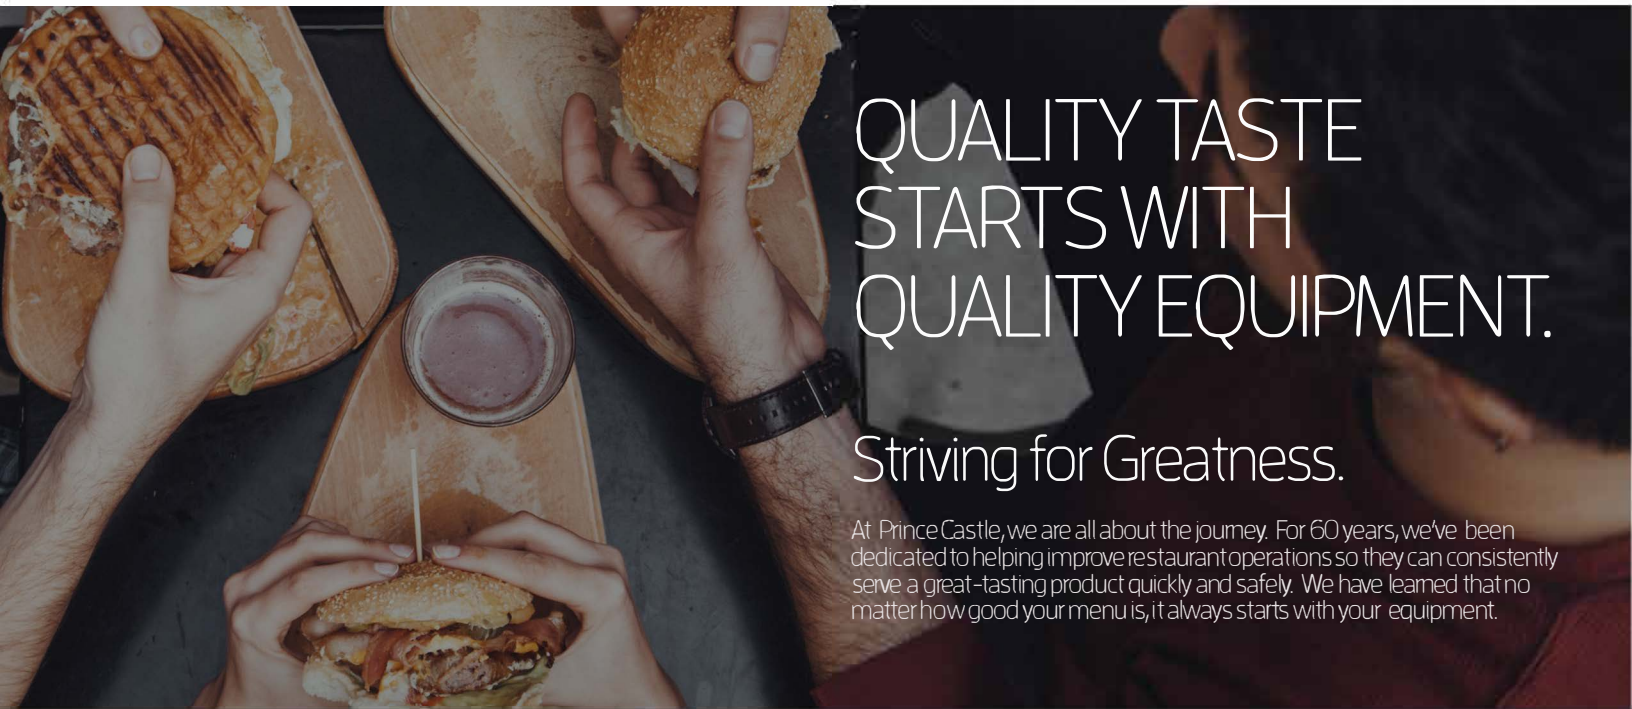

QUALITY TASTE STARTS WITH QUALITY EQUIPMENT.

Striving for Greatness.

At Prince Castle, we are all about the journey. For 60 years, we've been dedicated to helping improve restaurant operations so they can consistently serve a great-tasting product quickly and safely. We have learned that no matter how good your menu is, it always starts with your equipment.

Model Number	Description	Volts	Hertz	Watts	Amps	Plug
CTS-W	Toaster (Wire Belt)	120	50/60	1500	12.5	NEMA 5-15P
CTS-WCE	Toaster (Wire Belt)	220-240	50/60	1500	6.82-6.25	CEE7-7
CTS-WS	Toaster (Silicon Belt)	120	50/60	1500	12.5	NEMA 5-15P
CTS-WSCE	Toaster (Silicon Belt)	220-240	50/60	1500	6.82-6.25	CEE7-7
CTS-M	Toaster (Metal Belt)	120	50/60	1500	12.5	NEMA 5-15P
CTS-MCE	Toaster (Metal Belt)	220-240	50/60	1500	6.82-6.25	CEE7-7

Product Dimensions + Weight

Width: 20.25" (51.4cm)
 Depth: 7.25" (18.4cm)
 Height: 22.0" (55.9cm)

Unit Weight: 65.0 lbs (29.5kg)

Shipping

Width: 24.5" (62.2cm)
 Depth: 13.0" (33.0cm)
 Height: 27.0" (68.5cm)

Shipping Weight: 68.0 lbs (31.0kg)

Warranty

1-Year: Parts and Labor

Temperature Range

350°-550° F

Optional Accessories

Butter Wheel

Certifications



Conveyor Options



Silicone Belt

Wire Belt

Stainless Steel Belt

Conveyor design provides optional belt configurations to include wire, silicone or stainless steel pleated belt to meet any sandwich bun toasting application.

(Stainless Steel pleated belt recommended for dry bun applications only.)



A Marmon / Berkshire Hathaway Company

© 2018 Prince Castle LLC - Specifications and design are subject to change without notice

This product is patent protected. Patent information can be found at www.princecastle.com/patents/.

12/2018



Contact Us
 1-800-722-7853
www.princecastle.com