



Glo-Max®

Curved Infrared Strip Heaters

Models

GM5AH-30/-36/-42/-48/-54/-66/-78
GM5AHL-30/-36/-42/-48/-54/-66/-78

This stylish, patented design, based on our signature Glo-Max® strip heaters, is the perfect solution for your front-of-the-house applications. Superb for buffet and serving lines, the sleek curved design minimises its size while accenting and warming the products below.

GM5AHL, with versatile LED lighting options, provides perfect colouring and coverage while lowering energy costs

• Features

- The entire holding surface is heated evenly with no “cold spots”, thanks to Hatco’s dependable infrared element technology
- 7 lengths available: 762, 914, 1067, 1220, 1372, 1675, 1981 mm
- GM5AHL has energy efficient dual LED lights across the entire strip heater which provides longer performance and energy savings (compared to standard incandescent bulbs)
- Remote control box with infinite control
- 2 housing colour choices; clear anodised (standard) and black anodised
- Angle brackets are standard, non-adjustable tubular stands are an option
- GM5AHL has LED lights, GM5AH has no lights



Sleek Curved Design




Remote Control Box

GLO-MAX[®] Curved Infrared Strip Heaters





Models: GM5AH/GM5AHL

Unit: mm

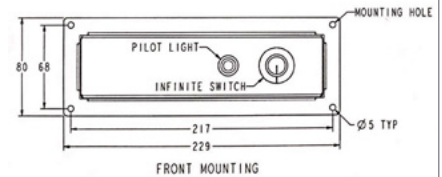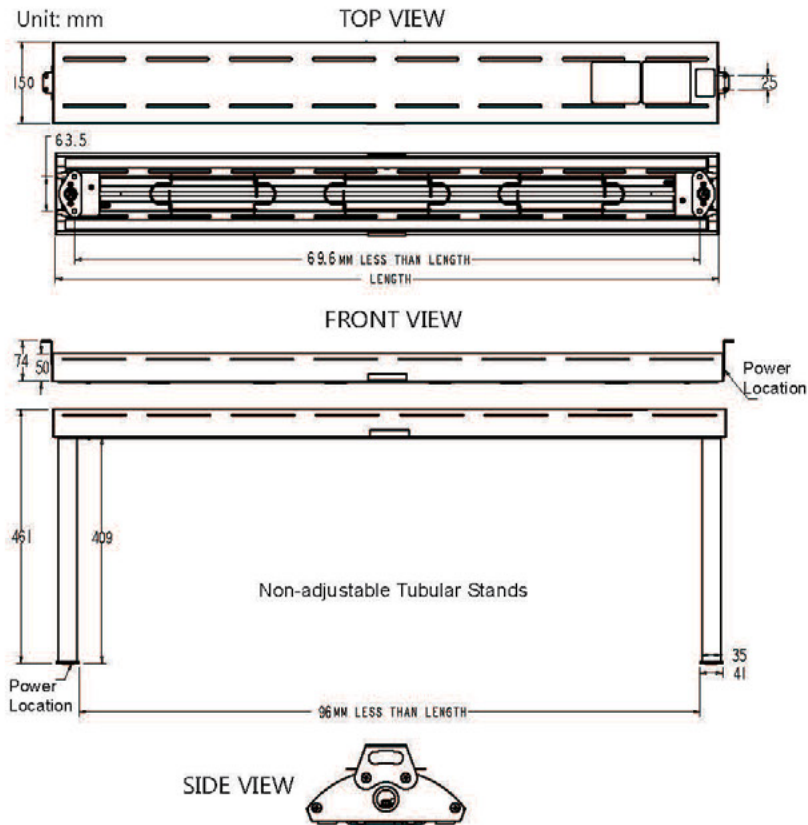

GM5AH Control Box

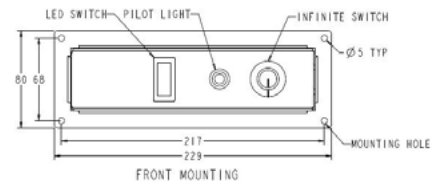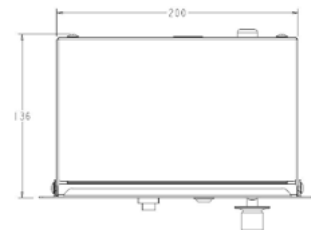

GM5AHL Control Box

• Specification

CODE	VOLTAGE	WATTS	AMPS	DIMENSIONS	WEIGHT
GM5AH-30	230 ~ 240	606 ~ 660	2.8	762W x 150D x 50Hmm	5Kg
GM5AHL-30	230 ~ 240	606 ~ 660	2.8		6Kg
GM5AH-36	230 ~ 240	735 ~ 800	3.3	915W x 150D x 50Hmm	6Kg
GM5AHL-36	230 ~ 240	756 ~ 812	3.4		6Kg
GM5AH-42	230 ~ 240	872 ~ 950	4.0	1067W x 150D x 50Hmm	7Kg
GM5AHL-42	230 ~ 240	885 ~ 964	4.0		7Kg
GM5AH-48	230 ~ 240	1010~1100	4.6	1220W x 150D x 50Hmm	7Kg
GM5AHL-48	230 ~ 240	1025~1116	4.7		8Kg
GM5AH-54	230 ~ 240	1148 ~ 1250	5.2	1372W x 150D x 50Hmm	8Kg
GM5AHL-54	230 ~ 240	1163 ~ 1267	5.3		8Kg
GM5AH-66	230 ~ 240	1433 ~ 1560	6.5	1675W x 150D x 50Hmm	9Kg
GM5AHL-66	230 ~ 240	1450 ~ 1579	6.6		10Kg
GM5AH-78	230 ~ 240	1736 ~ 1890	7.9	1981W x 150D x 50Hmm	10Kg
GM5AHL-78	230 ~ 240	1754 ~ 1910	8.0		11Kg

Clear anodized is the standard housing colour, black anodized is an option
 Angle brackets are standard, non-adjustable tubular stands, 406 mm (16"), are an option
 Warm LED light (3000K)
 Power wire lead length is 1524 mm