



There's only one #1™

Project _____

Item # _____

Quantity _____



Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

The Hatco Glo-Ray® Heated Shelf has an extruded aluminum base with non-slip rubber feet, stainless steel top and blanket-type element for uniform heat distribution. Fiberglass insulation keeps heat at the holding surface while a built-in adjustable thermostat controls surface temperature. Ideal for pass-through areas, buffet lines or as a heated work shelf.

Standard features

- Uniform heat distribution with blanket-type element
- Built-in adjustable thermostat controls surface temperature
- Available in widths from 18" to 72" (457-1829 mm) and depths from 6" to 25.5" (152-648 mm)
- Extruded aluminum base with stainless steel top (optional hardcoated aluminum surface)
- Standard legs:
Units 30" (762 mm) wide and under: 1" (25 mm) legs
Units 36" (914 mm) or wider: 4" (102 mm) legs
- All models include a 72" (1829 mm) cord and plug attached



Options (available at time of purchase only)

Designer Color (top surface not painted) – Clear Anodized Standard ☉▪

- Warm Red Black Gray Granite White Granite
- Navy Blue Hunter Green Antique Copper

Hardcoated Surface in lieu of Stainless Steel on Standard 19.5" (495 mm) deep "I" units - please consult factory for other depths

- GRS-18 through GRS-42 GRS-48 through GRS-72

Thermostat Guard

Accessories

4" (102 mm) adjustable Legs (Standard on GRS-36 units and larger)

Slant Leg Kit for models 12" (305 mm) deep or deeper

Pan Rail for 19.5" (495 mm) models only

- 2-Pan 3-Pan 4-Pan 5-Pan

ThruShelf Kit – Bolt and fender washer leg accessory kit for attaching one GRS unit to a wire rack shelf

☉Non-standard colors are non-returnable



▪ IFS anti-microbial coatings use naturally-occurring, environmentally sustainable, silver ions to help inhibit the growth of microbes on the powder coated surface. See www.hatcocorp.com/antimicrobial-paint for more information.




For operation, location and safety information, please refer to the Installation and Operating Manual.





Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72 (all depths)

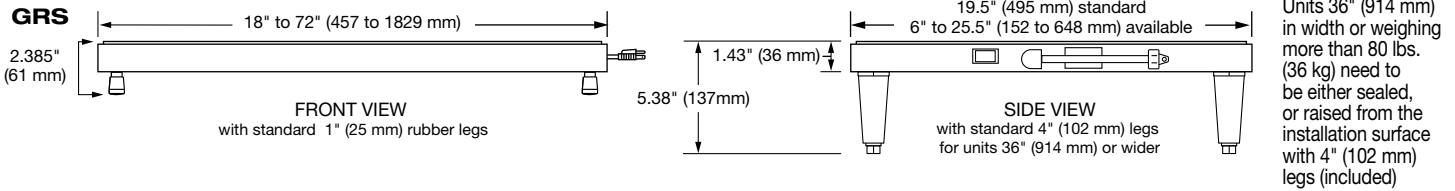

SPECIFICATIONS Glo-Ray® Heated Shelves

The shaded areas contain electrical information for international models

19.5" (495 mm) DEPTH (I)

| Model | Dimensions W x H (height includes legs) | Voltages Single Phase | Watts | Amps | Plug | Approx. Ship Weight |
|-----------|---|-----------------------------|---------|---------|----------------|---------------------------|
| GRS-18-I | 18" x 2.385" (457 x 61 mm) Legs: 1" (25 mm) | 100 | 250 | 2.5 | NEMA 5-15P | 16 lbs (8 kg) |
| | | 120 | 250 | 2.1 | NEMA 5-15P | |
| | | 220 | 229 | 1.0 | CEE 7/7 Schuko | |
| | | 240 | 272 | 1.1 | BS-1363 | |
| | | 220-230 (CE) | 229-250 | 1.0-1.1 | CEE 7/7 Schuko | |
| GRS-24-I | 24" x 2.385" (610 x 61 mm) Legs: 1" (25 mm) | 100 | 350 | 3.5 | NEMA 5-15P | 20 lbs (10 kg) |
| | | 120 | 350 | 2.9 | NEMA 5-15P | |
| | | 220 | 320 | 1.5 | CEE 7/7 Schuko | |
| | | 240 | 381 | 1.6 | BS-1363 | |
| | | 220-230 (CE) | 320-350 | 1.5-1.6 | CEE 7/7 Schuko | |
| GRS-30-I | 30" x 2.385" (762 x 61 mm) Legs: 1" (25 mm) | 100 | 450 | 4.5 | NEMA 5-15P | 25 lbs (12 kg) |
| | | 120 | 450 | 3.8 | NEMA 5-15P | |
| | | 220 | 412 | 1.9 | CEE 7/7 Schuko | |
| | | 240 | 490 | 2.0 | BS-1363 | |
| | | 220-230 (CE) | 412-450 | 1.9-2.0 | CEE 7/7 Schuko | |
| GRS-36-I* | 36" x 5.38" (914 x 137 mm) Legs: 4" (102 mm) | 100 | 550 | 5.5 | NEMA 5-15P | 28 lbs (13 kg) |
| | | 120 | 550 | 4.6 | NEMA 5-15P | |
| | | 220 | 503 | 2.3 | CEE 7/7 Schuko | |
| | | 240 | 599 | 2.5 | BS-1363 | |
| | | 220-230 (CE) | 503-550 | 2.3-2.4 | CEE 7/7 Schuko | |
| GRS-42-I* | 42" x 5.38" (1067 x 137 mm) Legs: 4" (102 mm) | 100 | 600 | 6.0 | NEMA 5-15P | 32 lbs (15 kg) |
| | | 120 | 600 | 5.0 | NEMA 5-15P | |
| | | 220 | 549 | 2.5 | CEE 7/7 Schuko | |
| | | 240 | 653 | 2.7 | BS-1363 | |
| | | 220-230 (CE) | 549-600 | 2.5-2.6 | CEE 7/7 Schuko | |

19.5" (495 mm) DEPTH (I)

| Model | Dimensions W x H (height includes legs) | Voltages Single phase | Watts | Amps | Plug | Approx. Ship Weight |
|-----------|---|-----------------------------|-----------|---------|----------------|---------------------------|
| GRS-48-I* | 48" x 5.38" (1219 x 137 mm) Legs: 4" (102 mm) | 100 | 700 | 7.0 | NEMA 5-15P | 36 lbs (17 kg) |
| | | 120 | 700 | 5.8 | NEMA 5-15P | |
| | | 220 | 640 | 2.9 | CEE 7/7 Schuko | |
| | | 240 | 762 | 3.2 | BS-1363 | |
| | | 220-230 (CE) | 640-700 | 2.9-3.0 | CEE 7/7 Schuko | |
| GRS-54-I* | 54" x 5.38" (1372 x 137 mm) Legs: 4" (102 mm) | 100 | 800 | 8.0 | NEMA 5-15P | 42 lbs. (20 kg) |
| | | 120 | 800 | 6.7 | NEMA 5-15P | |
| | | 220 | 732 | 3.3 | CEE 7/7 Schuko | |
| | | 240 | 871 | 3.6 | BS-1363 | |
| | | 220-230 (CE) | 732-800 | 3.3-3.5 | CEE 7/7 Schuko | |
| GRS-60-I* | 60" x 5.38" (1524 x 137 mm) Legs: 4" (102 mm) | 100 | 900 | 9.0 | NEMA 5-15P | 44 lbs. (20 kg) |
| | | 120 | 900 | 7.5 | NEMA 5-15P | |
| | | 220 | 823 | 3.7 | CEE 7/7 Schuko | |
| | | 240 | 980 | 4.1 | BS-1363 | |
| | | 220-230 (CE) | 823-900 | 3.7-3.9 | CEE 7/7 Schuko | |
| GRS-66-I* | 66" x 5.38" (1676 x 137 mm) Legs: 4" (102 mm) | 100 | 1000 | 10.0 | NEMA 5-15P | 50 lbs (23 kg) |
| | | 120 | 1000 | 8.3 | NEMA 5-15P | |
| | | 220 | 915 | 4.2 | CEE 7/7 Schuko | |
| | | 240 | 1089 | 4.5 | BS-1363 | |
| | | 220-230 (CE) | 915-1000 | 4.2-4.3 | CEE 7/7 Schuko | |
| GRS-72-I* | 72" x 5.38" (1829 x 137 mm) Legs: 4" (102 mm) | 100 | 1100 | 11.0 | NEMA 5-15P | 56 lbs (26 kg) |
| | | 120 | 1100 | 9.2 | NEMA 5-15P | |
| | | 220 | 1006 | 4.6 | CEE 7/7 Schuko | |
| | | 240 | 1198 | 5.0 | BS-1363 | |
| | | 220-230 (CE) | 1006-1100 | 4.6-4.8 | CEE 7/7 Schuko | |

* NSF requires units 36" (914 mm) and over in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.

Pan Capacity

Accommodates 12" x 20" (305 x 508 mm) steam table pans

| Model | Capacity | Model | Capacity |
|----------|----------|----------|----------|
| GRS-18-I | 1 pan | GRS-48-I | 3 pans |
| GRS-24-I | 1 pan | GRS-54-I | 4 pans |
| GRS-30-I | 2 pans | GRS-60-I | 4 pans |
| GRS-36-I | 2 pans | GRS-66-I | 5 pans |
| GRS-42-I | 3 pans | GRS-72-I | 5 pans |



Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72 (all depths)

SPECIFICATIONS Glo-Ray® Heated Shelves

The shaded areas contain electrical information for International models

6" (152 mm) DEPTH (A)

| Model | Dimensions W x H (height includes legs) | Voltages Single Phase | Watts | Amps | Plug | Ship Weight* |
|-----------|---|--------------------------|---------|---------|----------------|-------------------|
| GRS-18-A | 18" x 2.385" (457 x 61 mm) Legs: 1" (25 mm) | 120 | 100 | 0.8 | NEMA 5-15P | 10 lbs (5 kg) |
| | | 220 | 91 | 0.4 | CEE 7/7 Schuko | |
| | | 240 | 109 | 0.5 | BS-1363 | |
| | | 220-230 (CE) | 91-100 | 0.4 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 100-109 | 0.4-0.5 | BS-1363 | |
| GRS-24-A | 24" x 2.385" (610 x 61 mm) Legs: 1" (25 mm) | 120 | 125 | 1.0 | NEMA 5-15P | 11 lbs (5 kg) |
| | | 220 | 114 | 0.5 | CEE 7/7 Schuko | |
| | | 240 | 136 | 0.6 | BS-1363 | |
| | | 220-230 (CE) | 114-125 | 0.5 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 125-136 | 0.5-0.6 | BS-1363 | |
| GRS-30-A | 30" x 2.385" (762 x 61 mm) Legs: 1" (25 mm) | 120 | 150 | 1.3 | NEMA 5-15P | 9 lbs (5 kg) |
| | | 220 | 137 | 0.6 | CEE 7/7 Schuko | |
| | | 240 | 163 | 0.7 | BS-1363 | |
| | | 220-230 (CE) | 137-150 | 0.6-0.7 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 150-163 | 0.7 | BS-1363 | |
| GRS-36-A* | 36" x 5.38" (914 x 137 mm) Legs: 4" (102 mm) | 120 | 175 | 1.5 | NEMA 5-15P | 11 lbs (5 kg) |
| | | 220 | 160 | 0.7 | CEE 7/7 Schuko | |
| | | 240 | 191 | 0.8 | BS-1363 | |
| | | 220-230 (CE) | 160-175 | 0.7-0.8 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 175-191 | 0.8 | BS-1363 | |
| GRS-42-A* | 42" x 5.38" (1067 x 137 mm) Legs: 4" (102 mm) | 120 | 225 | 1.9 | NEMA 5-15P | 15 lbs (7 kg) |
| | | 220 | 205 | 0.9 | CEE 7/7 Schuko | |
| | | 240 | 245 | 1.0 | BS-1363 | |
| | | 220-230 (CE) | 205-225 | 0.9-1.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 225-245 | 1.0 | BS-1363 | |
| GRS-48-A* | 48" x 5.38" (1219 x 137 mm) Legs: 4" (102 mm) | 120 | 250 | 2.1 | NEMA 5-15P | 16 lbs (8 kg) |
| | | 220 | 228 | 1.0 | CEE 7/7 Schuko | |
| | | 240 | 272 | 1.1 | BS-1363 | |
| | | 220-230 (CE) | 228-250 | 1.0-1.1 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 250-272 | 1.1 | BS-1363 | |
| GRS-54-A* | 54" x 5.38" (1372 x 137 mm) Legs: 4" (102 mm) | 120 | 275 | 2.3 | NEMA 5-15P | 17 lbs (8 kg) |
| | | 220 | 251 | 1.1 | CEE 7/7 Schuko | |
| | | 240 | 299 | 1.2 | BS-1363 | |
| | | 220-230 (CE) | 251-275 | 1.1-1.2 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 275-299 | 1.2 | BS-1363 | |
| GRS-60-A* | 60" x 5.38" (1524 x 137 mm) Legs: 4" (102 mm) | 120 | 300 | 2.5 | NEMA 5-15P | 18 lbs (9 kg) |
| | | 220 | 274 | 1.2 | CEE 7/7 Schuko | |
| | | 240 | 327 | 1.4 | BS-1363 | |
| | | 220-230 (CE) | 274-300 | 1.2-1.3 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 300-327 | 1.3-1.4 | BS-1363 | |
| GRS-66-A* | 66" x 5.38" (1676 x 137 mm) Legs: 4" (102 mm) | 120 | 325 | 2.7 | NEMA 5-15P | 20 lbs (9 kg) |
| | | 220 | 297 | 1.4 | CEE 7/7 Schuko | |
| | | 240 | 354 | 1.5 | BS-1363 | |
| | | 220-230 (CE) | 297-325 | 1.4 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 325-354 | 1.4-1.5 | BS-1363 | |
| GRS-72-A* | 72" x 5.38" (1829 x 137 mm) Legs: 4" (102 mm) | 120 | 350 | 2.9 | NEMA 5-15P | 22 lbs (10 kg) |
| | | 220 | 320 | 1.5 | CEE 7/7 Schuko | |
| | | 240 | 381 | 1.6 | BS-1363 | |
| | | 220-230 (CE) | 320-350 | 1.5 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 350-381 | 1.5-1.6 | BS-1363 | |

7.75" (197 mm) DEPTH (B)

| Model | Dimensions W x H (height includes legs) | Voltages Single phase | Watts | Amps | Plug | Ship Weight* |
|-----------|---|--------------------------|---------|---------|----------------|-------------------|
| GRS-18-B | 18" x 2.385" (457 x 61 mm) Legs: 1" (25 mm) | 120 | 100 | 0.8 | NEMA 5-15P | 10 lbs (5 kg) |
| | | 220 | 91 | 0.4 | CEE 7/7 Schuko | |
| | | 240 | 109 | 0.5 | BS-1363 | |
| | | 220-230 (CE) | 91-100 | 0.4 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 100-109 | 0.4-0.5 | BS-1363 | |
| GRS-24-B | 24" x 2.385" (610 x 61 mm) Legs: 1" (25 mm) | 120 | 125 | 1.0 | NEMA 5-15P | 10 lbs (5 kg) |
| | | 220 | 114 | 0.5 | CEE 7/7 Schuko | |
| | | 240 | 136 | 0.6 | BS-1363 | |
| | | 220-230 (CE) | 114-125 | 0.5 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 125-136 | 0.5-0.6 | BS-1363 | |
| GRS-30-B | 30" x 2.385" (762 x 61 mm) Legs: 1" (25 mm) | 120 | 150 | 1.3 | NEMA 5-15P | 12 lbs (6 kg) |
| | | 220 | 137 | 0.6 | CEE 7/7 Schuko | |
| | | 240 | 163 | 0.7 | BS-1363 | |
| | | 220-230 (CE) | 137-150 | 0.6-0.7 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 150-163 | 0.7 | BS-1363 | |
| GRS-36-B* | 36" x 5.38" (914 x 137 mm) Legs: 4" (102 mm) | 120 | 175 | 1.5 | NEMA 5-15P | 14 lbs (7 kg) |
| | | 220 | 160 | 0.7 | CEE 7/7 Schuko | |
| | | 240 | 191 | 0.8 | BS-1363 | |
| | | 220-230 (CE) | 160-175 | 0.7-0.8 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 175-191 | 0.8 | BS-1363 | |
| GRS-42-B* | 42" x 5.38" (1067 x 137 mm) Legs: 4" (102 mm) | 120 | 225 | 1.9 | NEMA 5-15P | 17 lbs (8 kg) |
| | | 220 | 205 | 0.9 | CEE 7/7 Schuko | |
| | | 240 | 245 | 1.0 | BS-1363 | |
| | | 220-230 (CE) | 205-225 | 0.9-1.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 225-245 | 1.0 | BS-1363 | |
| GRS-48-B* | 48" x 5.38" (1219 x 137 mm) Legs: 4" (102 mm) | 120 | 250 | 2.1 | NEMA 5-15P | 19 lbs (9 kg) |
| | | 220 | 228 | 1.0 | CEE 7/7 Schuko | |
| | | 240 | 272 | 1.1 | BS-1363 | |
| | | 220-230 (CE) | 228-250 | 1.0-1.1 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 250-272 | 1.1 | BS-1363 | |
| GRS-54-B* | 54" x 5.38" (1372 x 137 mm) Legs: 4" (102 mm) | 120 | 275 | 2.3 | NEMA 5-15P | 20 lbs (10 kg) |
| | | 220 | 251 | 1.1 | CEE 7/7 Schuko | |
| | | 240 | 299 | 1.2 | BS-1363 | |
| | | 220-230 (CE) | 251-275 | 1.1-1.2 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 275-299 | 1.2 | BS-1363 | |
| GRS-60-B* | 60" x 5.38" (1524 x 137 mm) Legs: 4" (102 mm) | 120 | 300 | 2.5 | NEMA 5-15P | 21 lbs (10 kg) |
| | | 220 | 274 | 1.2 | CEE 7/7 Schuko | |
| | | 240 | 327 | 1.4 | BS-1363 | |
| | | 220-230 (CE) | 274-300 | 1.2-1.3 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 300-327 | 1.3-1.4 | BS-1363 | |
| GRS-66-B* | 66" x 5.38" (1676 x 137 mm) Legs: 4" (102 mm) | 120 | 325 | 2.7 | NEMA 5-15P | 23 lbs (11 kg) |
| | | 220 | 297 | 1.4 | CEE 7/7 Schuko | |
| | | 240 | 354 | 1.5 | BS-1363 | |
| | | 220-230 (CE) | 297-325 | 1.4 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 325-354 | 1.4-1.5 | BS-1363 | |
| GRS-72-B* | 72" x 5.38" (1829 x 137 mm) Legs: 4" (102 mm) | 120 | 350 | 2.9 | NEMA 5-15P | 25 lbs (12 kg) |
| | | 220 | 320 | 1.5 | CEE 7/7 Schuko | |
| | | 240 | 381 | 1.6 | BS-1363 | |
| | | 220-230 (CE) | 320-350 | 1.5 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 350-381 | 1.5-1.6 | BS-1363 | |

* NSF requires units 36" (914 mm) and over in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.
* Shipping weight includes packaging.



Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72 (all depths)

SPECIFICATIONS Glo-Ray® Heated Shelves

The shaded areas contain electrical information for International models

| 9.75" (248 mm) DEPTH (C) | | | | | | |
|--------------------------|---|--------------------------|---------|---------|----------------|-------------------|
| Model | Dimensions W x H (height includes legs) | Voltages Single Phase | Watts | Amps | Plug | Ship Weight* |
| GRS-18-C | 18" x 2.385" (457 x 61 mm) Legs: 1" (25 mm) | 120 | 125 | 1.0 | NEMA 5-15P | 12 lbs (6 kg) |
| | | 220 | 114 | 0.5 | CEE 7/7 Schuko | |
| | | 240 | 136 | 0.6 | BS-1363 | |
| | | 220-230 (CE) | 114-125 | 0.5 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 125-136 | 0.5-0.6 | BS-1363 | |
| GRS-24-C | 24" x 2.385" (610 x 61 mm) Legs: 1" (25 mm) | 120 | 175 | 1.5 | NEMA 5-15P | 13 lbs (6 kg) |
| | | 220 | 160 | 0.7 | CEE 7/7 Schuko | |
| | | 240 | 191 | 0.8 | BS-1363 | |
| | | 220-230 (CE) | 160-175 | 0.7-0.8 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 175-191 | 0.8 | BS-1363 | |
| GRS-30-C | 30" x 2.385" (762 x 61 mm) Legs: 1" (25 mm) | 120 | 225 | 1.9 | NEMA 5-15P | 14 lbs (7 kg) |
| | | 220 | 206 | 0.9 | CEE 7/7 Schuko | |
| | | 240 | 245 | 1.0 | BS-1363 | |
| | | 220-230 (CE) | 206-225 | 0.9-1.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 225-245 | 1.0 | BS-1363 | |
| GRS-36-C* | 36" x 5.38" (914 x 137 mm) Legs: 4" (102 mm) | 120 | 275 | 2.3 | NEMA 5-15P | 16 lbs (8 kg) |
| | | 220 | 252 | 1.1 | CEE 7/7 Schuko | |
| | | 240 | 299 | 1.2 | BS-1363 | |
| | | 220-230 (CE) | 252-275 | 1.1-1.2 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 275-299 | 1.2 | BS-1363 | |
| GRS-42-C* | 42" x 5.38" (1067 x 137 mm) Legs: 4" (102 mm) | 120 | 300 | 2.5 | NEMA 5-15P | 18 lbs (9 kg) |
| | | 220 | 274 | 1.2 | CEE 7/7 Schuko | |
| | | 240 | 327 | 1.4 | BS-1363 | |
| | | 220-230 (CE) | 274-300 | 1.2-1.3 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 300-327 | 1.3-1.4 | BS-1363 | |
| GRS-48-C* | 48" x 5.38" (1219 x 137 mm) Legs: 4" (102 mm) | 120 | 350 | 2.9 | NEMA 5-15P | 20 lbs (9 kg) |
| | | 220 | 320 | 1.5 | CEE 7/7 Schuko | |
| | | 240 | 381 | 1.6 | BS-1363 | |
| | | 220-230 (CE) | 320-350 | 1.5 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 350-381 | 1.5-1.6 | BS-1363 | |
| GRS-54-C* | 54" x 5.38" (1372 x 137 mm) Legs: 4" (102 mm) | 120 | 400 | 3.3 | NEMA 5-15P | 22 lbs (10 kg) |
| | | 220 | 366 | 1.7 | CEE 7/7 Schuko | |
| | | 240 | 436 | 1.8 | BS-1363 | |
| | | 220-230 (CE) | 366-400 | 1.7 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 400-436 | 1.7-1.8 | BS-1363 | |
| GRS-60-C* | 60" x 5.38" (1524 x 137 mm) Legs: 4" (102 mm) | 120 | 450 | 3.8 | NEMA 5-15P | 25 lbs (12 kg) |
| | | 220 | 412 | 1.9 | CEE 7/7 Schuko | |
| | | 240 | 490 | 2.0 | BS-1363 | |
| | | 220-230 (CE) | 412-450 | 1.9-2.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 450-490 | 2.0 | BS-1363 | |
| GRS-66-C* | 66" x 5.38" (1676 x 137 mm) Legs: 4" (102 mm) | 120 | 500 | 4.2 | NEMA 5-15P | 26 lbs (12 kg) |
| | | 220 | 458 | 2.1 | CEE 7/7 Schuko | |
| | | 240 | 544 | 2.3 | BS-1363 | |
| | | 220-230 (CE) | 458-500 | 2.1-2.2 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 500-544 | 2.2-2.3 | BS-1363 | |
| GRS-72-C* | 72" x 5.38" (1829 x 137 mm) Legs: 4" (102 mm) | 120 | 550 | 4.6 | NEMA 5-15P | 28 lbs (13 kg) |
| | | 220 | 504 | 2.3 | CEE 7/7 Schuko | |
| | | 240 | 599 | 2.5 | BS-1363 | |
| | | 220-230 (CE) | 504-550 | 2.3-2.4 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 550-599 | 2.4-2.5 | BS-1363 | |

| 12" (305 mm) DEPTH (D) | | | | | | |
|------------------------|---|--------------------------|---------|---------|----------------|-------------------|
| Model | Dimensions W x H (height includes legs) | Voltages Single phase | Watts | Amps | Plug | Ship Weight* |
| GRS-18-D | 18" x 2.385" (457 x 61 mm) Legs: 1" (25 mm) | 120 | 200 | 1.7 | NEMA 5-15P | 12 lbs (6 kg) |
| | | 220 | 183 | 0.8 | CEE 7/7 Schuko | |
| | | 240 | 218 | 0.9 | BS-1363 | |
| | | 220-230 (CE) | 183-200 | 0.8-0.9 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 200-218 | 0.9 | BS-1363 | |
| GRS-24-D | 24" x 2.385" (610 x 61 mm) Legs: 1" (25 mm) | 120 | 250 | 2.1 | NEMA 5-15P | 15 lbs (7 kg) |
| | | 220 | 229 | 1.0 | CEE 7/7 Schuko | |
| | | 240 | 272 | 1.1 | BS-1363 | |
| | | 220-230 (CE) | 229-250 | 1.0-1.1 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 250-272 | 1.1 | BS-1363 | |
| GRS-30-D | 30" x 2.385" (762 x 61 mm) Legs: 1" (25 mm) | 120 | 300 | 2.5 | NEMA 5-15P | 17 lbs (8 kg) |
| | | 220 | 274 | 1.2 | CEE 7/7 Schuko | |
| | | 240 | 327 | 1.4 | BS-1363 | |
| | | 220-230 (CE) | 274-300 | 1.2-1.3 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 300-327 | 1.3-1.4 | BS-1363 | |
| GRS-36-D* | 36" x 5.38" (914 x 137 mm) Legs: 4" (102 mm) | 120 | 350 | 2.9 | NEMA 5-15P | 20 lbs (9 kg) |
| | | 220 | 320 | 1.5 | CEE 7/7 Schuko | |
| | | 240 | 381 | 1.6 | BS-1363 | |
| | | 220-230 (CE) | 320-350 | 1.5 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 350-381 | 1.5-1.6 | BS-1363 | |
| GRS-42-D* | 42" x 5.38" (1067 x 137 mm) Legs: 4" (102 mm) | 120 | 450 | 3.8 | NEMA 5-15P | 23 lbs (11 kg) |
| | | 220 | 412 | 1.9 | CEE 7/7 Schuko | |
| | | 240 | 490 | 2.0 | BS-1363 | |
| | | 220-230 (CE) | 412-450 | 1.9-2.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 450-490 | 2.0 | BS-1363 | |
| GRS-48-D* | 48" x 5.38" (1219 x 137 mm) Legs: 4" (102 mm) | 120 | 500 | 4.2 | NEMA 5-15P | 26 lbs (12 kg) |
| | | 220 | 457 | 2.1 | CEE 7/7 Schuko | |
| | | 240 | 544 | 2.3 | BS-1363 | |
| | | 220-230 (CE) | 457-500 | 2.1-2.2 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 500-544 | 2.2-2.3 | BS-1363 | |
| GRS-54-D* | 54" x 5.38" (1372 x 137 mm) Legs: 4" (102 mm) | 120 | 550 | 4.6 | NEMA 5-15P | 30 lbs (14 kg) |
| | | 220 | 503 | 2.3 | CEE 7/7 Schuko | |
| | | 240 | 599 | 2.5 | BS-1363 | |
| | | 220-230 (CE) | 503-550 | 2.3-2.4 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 550-599 | 2.4-2.5 | BS-1363 | |
| GRS-60-D* | 60" x 5.38" (1524 x 137 mm) Legs: 4" (102 mm) | 120 | 600 | 5.0 | NEMA 5-15P | 34 lbs (16 kg) |
| | | 220 | 548 | 2.5 | CEE 7/7 Schuko | |
| | | 240 | 653 | 2.7 | BS-1363 | |
| | | 220-230 (CE) | 548-600 | 2.5-2.6 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 600-653 | 2.6-2.7 | BS-1363 | |
| GRS-66-D* | 66" x 5.38" (1676 x 137 mm) Legs: 4" (102 mm) | 120 | 650 | 5.4 | NEMA 5-15P | 36 lbs (17 kg) |
| | | 220 | 594 | 2.7 | CEE 7/7 Schuko | |
| | | 240 | 708 | 3.0 | BS-1363 | |
| | | 220-230 (CE) | 594-650 | 2.7-2.8 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 650-708 | 2.8-3.0 | BS-1363 | |
| GRS-72-D* | 72" x 5.38" (1829 x 137 mm) Legs: 4" (102 mm) | 120 | 700 | 5.8 | NEMA 5-15P | 37 lbs (17 kg) |
| | | 220 | 640 | 2.9 | CEE 7/7 Schuko | |
| | | 240 | 762 | 3.2 | BS-1363 | |
| | | 220-230 (CE) | 640-700 | 2.9-3.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 700-762 | 3.0-3.2 | BS-1363 | |

* NSF requires units 36" (914 mm) and over in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.
* Shipping weight includes packaging.



Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72 (all depths)

SPECIFICATIONS Glo-Ray® Heated Shelves

The shaded areas contain electrical information for International models

| 13.75" (349 mm) DEPTH (E) | | | | | | | 15.5" (394 mm) DEPTH (F) | | | | | | |
|---------------------------|---|--------------------------|---------|---------|----------------|-------------------|--------------------------|---|--------------------------|---------|---------|----------------|-------------------|
| Model | Dimensions W x H (height includes legs) | Voltages Single Phase | Watts | Amps | Plug | Ship Weight* | Model | Dimensions W x H (height includes legs) | Voltages Single phase | Watts | Amps | Plug | Ship Weight* |
| GRS-18-E | 18" x 2.385" (457 x 61 mm) Legs: 1" (25 mm) | 120 | 200 | 1.7 | NEMA 5-15P | 13 lbs (6 kg) | GRS-18-F | 18" x 2.385" (457 x 61 mm) Legs: 1" (25 mm) | 120 | 200 | 1.7 | NEMA 5-15P | 16 lbs (7 kg) |
| | | 220 | 183 | 0.8 | CEE 7/7 Schuko | | | | 220 | 183 | 0.8 | CEE 7/7 Schuko | |
| | | 240 | 218 | 0.9 | BS-1363 | | | | 240 | 218 | 0.9 | BS-1363 | |
| | | 220-230 (CE) | 183-200 | 0.8-0.9 | CEE 7/7 Schuko | | | | 220-230 (CE) | 183-200 | 0.8-0.9 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 200-218 | 0.9 | BS-1363 | | | | 230-240 (CE) | 200-218 | 0.9 | BS-1363 | |
| GRS-24-E | 24" x 2.385" (610 x 61 mm) Legs: 1" (25 mm) | 120 | 250 | 2.1 | NEMA 5-15P | 14 lbs (7 kg) | GRS-24-F | 24" x 2.385" (610 x 61 mm) Legs: 1" (25 mm) | 120 | 250 | 2.1 | NEMA 5-15P | 17 lbs (8 kg) |
| | | 220 | 229 | 1.0 | CEE 7/7 Schuko | | | | 220 | 229 | 1.0 | CEE 7/7 Schuko | |
| | | 240 | 272 | 1.1 | BS-1363 | | | | 240 | 272 | 1.1 | BS-1363 | |
| | | 220-230 (CE) | 229-250 | 1.0-1.1 | CEE 7/7 Schuko | | | | 220-230 (CE) | 229-250 | 1.0-1.1 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 250-272 | 1.1 | BS-1363 | | | | 230-240 (CE) | 250-272 | 1.1 | BS-1363 | |
| GRS-30-E | 30" x 2.385" (762 x 61 mm) Legs: 1" (25 mm) | 120 | 300 | 2.5 | NEMA 5-15P | 18 lbs (9 kg) | GRS-30-F | 30" x 2.385" (762 x 61 mm) Legs: 1" (25 mm) | 120 | 300 | 2.5 | NEMA 5-15P | 22 lbs (10 kg) |
| | | 220 | 274 | 1.2 | CEE 7/7 Schuko | | | | 220 | 274 | 1.2 | CEE 7/7 Schuko | |
| | | 240 | 327 | 1.4 | BS-1363 | | | | 240 | 327 | 1.4 | BS-1363 | |
| | | 220-230 (CE) | 274-300 | 1.2-1.3 | CEE 7/7 Schuko | | | | 220-230 (CE) | 274-300 | 1.2-1.3 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 300-327 | 1.3-1.4 | BS-1363 | | | | 230-240 (CE) | 300-327 | 1.3-1.4 | BS-1363 | |
| GRS-36-E* | 36" x 5.38" (914 x 137 mm) Legs: 4" (102 mm) | 120 | 350 | 2.9 | NEMA 5-15P | 22 lbs (10 kg) | GRS-36-F* | 36" x 5.38" (914 x 137 mm) Legs: 4" (102 mm) | 120 | 350 | 2.9 | NEMA 5-15P | 25 lbs (12 kg) |
| | | 220 | 320 | 1.5 | CEE 7/7 Schuko | | | | 220 | 320 | 1.5 | CEE 7/7 Schuko | |
| | | 240 | 381 | 1.6 | BS-1363 | | | | 240 | 381 | 1.6 | BS-1363 | |
| | | 220-230 (CE) | 320-350 | 1.5 | CEE 7/7 Schuko | | | | 220-230 (CE) | 320-350 | 1.5 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 350-381 | 1.5-1.6 | BS-1363 | | | | 230-240 (CE) | 350-381 | 1.5-1.6 | BS-1363 | |
| GRS-42-E* | 42" x 5.38" (1067 x 137 mm) Legs: 4" (102 mm) | 120 | 450 | 3.8 | NEMA 5-15P | 26 lbs (12 kg) | GRS-42-F* | 42" x 5.38" (1067 x 137 mm) Legs: 4" (102 mm) | 120 | 450 | 3.8 | NEMA 5-15P | 26 lbs (12 kg) |
| | | 220 | 412 | 1.9 | CEE 7/7 Schuko | | | | 220 | 412 | 1.9 | CEE 7/7 Schuko | |
| | | 240 | 490 | 2.0 | BS-1363 | | | | 240 | 490 | 2.0 | BS-1363 | |
| | | 220-230 (CE) | 412-450 | 1.9-2.0 | CEE 7/7 Schuko | | | | 220-230 (CE) | 412-450 | 1.9-2.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 450-490 | 2.0-2.1 | BS-1363 | | | | 230-240 (CE) | 450-490 | 2.0 | BS-1363 | |
| GRS-48-E* | 48" x 5.38" (1219 x 137 mm) Legs: 4" (102 mm) | 120 | 500 | 4.2 | NEMA 5-15P | 29 lbs (14 kg) | GRS-48-F* | 48" x 5.38" (1219 x 137 mm) Legs: 4" (102 mm) | 120 | 500 | 4.2 | NEMA 5-15P | 32 lbs (15 kg) |
| | | 220 | 457 | 2.1 | CEE 7/7 Schuko | | | | 220 | 457 | 2.1 | CEE 7/7 Schuko | |
| | | 240 | 544 | 2.3 | BS-1363 | | | | 240 | 544 | 2.3 | BS-1363 | |
| | | 220-230 (CE) | 457-500 | 2.1-2.2 | CEE 7/7 Schuko | | | | 220-230 (CE) | 457-500 | 2.1-2.2 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 500-544 | 2.2-2.3 | BS-1363 | | | | 230-240 (CE) | 500-544 | 2.2-2.3 | BS-1363 | |
| GRS-54-E* | 54" x 5.38" (1372 x 137 mm) Legs: 4" (102 mm) | 120 | 550 | 4.6 | NEMA 5-15P | 33 lbs (15 kg) | GRS-54-F* | 54" x 5.38" (1372 x 137 mm) Legs: 4" (102 mm) | 120 | 550 | 4.6 | NEMA 5-15P | 38 lbs (18 kg) |
| | | 220 | 503 | 2.3 | CEE 7/7 Schuko | | | | 220 | 503 | 2.3 | CEE 7/7 Schuko | |
| | | 240 | 599 | 2.5 | BS-1363 | | | | 240 | 599 | 2.5 | BS-1363 | |
| | | 220-230 (CE) | 503-550 | 2.3-2.4 | CEE 7/7 Schuko | | | | 220-230 (CE) | 503-550 | 2.3-2.4 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 550-599 | 2.4-2.5 | BS-1363 | | | | 230-240 (CE) | 550-599 | 2.4-2.5 | BS-1363 | |
| GRS-60-E* | 60" x 5.38" (1524 x 137 mm) Legs: 4" (102 mm) | 120 | 600 | 5.0 | NEMA 5-15P | 36 lbs (17 kg) | GRS-60-F* | 60" x 5.38" (1524 x 137 mm) Legs: 4" (102 mm) | 120 | 600 | 5.0 | NEMA 5-15P | 39 lbs (18 kg) |
| | | 220 | 548 | 2.5 | CEE 7/7 Schuko | | | | 220 | 548 | 2.5 | CEE 7/7 Schuko | |
| | | 240 | 653 | 2.7 | BS-1363 | | | | 240 | 653 | 2.7 | BS-1363 | |
| | | 220-230 (CE) | 548-600 | 2.5-2.6 | CEE 7/7 Schuko | | | | 220-230 (CE) | 548-600 | 2.5-2.6 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 600-653 | 2.6-2.7 | BS-1363 | | | | 230-240 (CE) | 600-653 | 2.6-2.7 | BS-1363 | |
| GRS-66-E* | 66" x 5.38" (1676 x 137 mm) Legs: 4" (102 mm) | 120 | 650 | 5.4 | NEMA 5-15P | 38 lbs (18 kg) | GRS-66-F* | 66" x 5.38" (1676 x 137 mm) Legs: 4" (102 mm) | 120 | 650 | 5.4 | NEMA 5-15P | 42 lbs (19 kg) |
| | | 220 | 594 | 2.7 | CEE 7/7 Schuko | | | | 220 | 594 | 2.7 | CEE 7/7 Schuko | |
| | | 240 | 708 | 3.0 | BS-1363 | | | | 240 | 708 | 3.0 | BS-1363 | |
| | | 220-230 (CE) | 594-650 | 2.7-2.8 | CEE 7/7 Schuko | | | | 220-230 (CE) | 594-650 | 2.7-2.8 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 650-708 | 2.8-3.0 | BS-1363 | | | | 230-240 (CE) | 650-708 | 2.8-3.0 | BS-1363 | |
| GRS-72-E* | 72" x 5.38" (1829 x 137 mm) Legs: 4" (102 mm) | 120 | 700 | 5.8 | NEMA 5-15P | 40 lbs (19 kg) | GRS-72-F* | 72" x 5.38" (1829 x 137 mm) Legs: 4" (102 mm) | 120 | 700 | 5.8 | NEMA 5-15P | 46 lbs (21 kg) |
| | | 220 | 640 | 2.9 | CEE 7/7 Schuko | | | | 220 | 640 | 2.9 | CEE 7/7 Schuko | |
| | | 240 | 762 | 3.2 | BS-1363 | | | | 240 | 762 | 3.2 | BS-1363 | |
| | | 220-230 (CE) | 640-700 | 2.9-3.0 | CEE 7/7 Schuko | | | | 220-230 (CE) | 640-700 | 2.9-3.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 700-762 | 3.0-3.2 | BS-1363 | | | | 230-240 (CE) | 700-762 | 3.0-3.2 | BS-1363 | |

* NSF requires units 36" (914 mm) and over in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.
* Shipping weight includes packaging.



Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72 (all depths)

SPECIFICATIONS Glo-Ray® Heated Shelves

The shaded areas contain electrical information for International models

| 15.75" (400 mm) DEPTH (G) | | | | | | |
|---------------------------|---|--------------------------|---------|---------|----------------|-------------------|
| Model | Dimensions W x H (height includes legs) | Voltages Single Phase | Watts | Amps | Plug | Ship Weight* |
| GRS-18-G | 18" x 2.385" (457 x 61 mm) Legs: 1" (25 mm) | 120 | 225 | 1.9 | NEMA 5-15P | 16 lbs (7 kg) |
| | | 220 | 206 | 0.9 | CEE 7/7 Schuko | |
| | | 240 | 245 | 1.0 | BS-1363 | |
| | | 220-230 (CE) | 206-225 | 0.9-1.0 | CEE 7/7 Schuko | |
| GRS-24-G | 24" x 2.385" (610 x 61 mm) Legs: 1" (25 mm) | 120 | 300 | 2.5 | NEMA 5-15P | 18 lbs (9 kg) |
| | | 220 | 274 | 1.2 | CEE 7/7 Schuko | |
| | | 240 | 327 | 1.4 | BS-1363 | |
| | | 220-230 (CE) | 274-300 | 1.2-1.3 | CEE 7/7 Schuko | |
| GRS-30-G | 30" x 2.385" (762 x 61 mm) Legs: 1" (25 mm) | 120 | 375 | 3.1 | NEMA 5-15P | 21 lbs (10 kg) |
| | | 220 | 343 | 1.6 | CEE 7/7 Schuko | |
| | | 240 | 408 | 1.7 | BS-1363 | |
| | | 220-230 (CE) | 343-375 | 1.6 | CEE 7/7 Schuko | |
| GRS-36-G | 36" x 5.38" (914 x 137 mm) Legs: 4" (102 mm) | 120 | 450 | 3.8 | NEMA 5-15P | 27 lbs (13 kg) |
| | | 220 | 412 | 1.9 | CEE 7/7 Schuko | |
| | | 240 | 490 | 2.0 | BS-1363 | |
| | | 220-230 (CE) | 412-450 | 1.9-2.0 | CEE 7/7 Schuko | |
| GRS-42-G | 42" x 5.38" (1067 x 137 mm) Legs: 4" (102 mm) | 120 | 525 | 4.4 | NEMA 5-15P | 29 lbs (14 kg) |
| | | 220 | 480 | 2.2 | CEE 7/7 Schuko | |
| | | 240 | 572 | 2.4 | BS-1363 | |
| | | 220-230 (CE) | 480-525 | 2.2-2.3 | CEE 7/7 Schuko | |
| GRS-48-G | 48" x 5.38" (1219 x 137 mm) Legs: 4" (102 mm) | 120 | 600 | 5.0 | NEMA 5-15P | 33 lbs (15 kg) |
| | | 220 | 549 | 2.5 | CEE 7/7 Schuko | |
| | | 240 | 653 | 2.7 | BS-1363 | |
| | | 220-230 (CE) | 549-600 | 2.5-2.6 | CEE 7/7 Schuko | |
| GRS-54-G | 54" x 5.38" (1372 x 137 mm) Legs: 4" (102 mm) | 120 | 675 | 5.6 | NEMA 5-15P | 38 lbs (18 kg) |
| | | 220 | 618 | 2.8 | CEE 7/7 Schuko | |
| | | 240 | 735 | 3.1 | BS-1363 | |
| | | 220-230 (CE) | 618-675 | 2.8-2.9 | CEE 7/7 Schuko | |
| GRS-60-G | 60" x 5.38" (1524 x 137 mm) Legs: 4" (102 mm) | 120 | 750 | 6.3 | NEMA 5-15P | 42 lbs (19 kg) |
| | | 220 | 686 | 3.1 | CEE 7/7 Schuko | |
| | | 240 | 817 | 3.4 | BS-1363 | |
| | | 220-230 (CE) | 686-750 | 3.1-3.3 | CEE 7/7 Schuko | |
| GRS-66-G | 66" x 5.38" (1676 x 137 mm) Legs: 4" (102 mm) | 120 | 825 | 6.9 | NEMA 5-15P | 45 lbs (21 kg) |
| | | 220 | 755 | 3.4 | CEE 7/7 Schuko | |
| | | 240 | 898 | 3.7 | BS-1363 | |
| | | 220-230 (CE) | 755-825 | 3.4-3.6 | CEE 7/7 Schuko | |
| GRS-72-G | 72" x 5.38" (1829 x 137 mm) Legs: 4" (102 mm) | 120 | 900 | 7.5 | NEMA 5-15P | 46 lbs (21 kg) |
| | | 220 | 823 | 3.7 | CEE 7/7 Schuko | |
| | | 240 | 980 | 4.1 | BS-1363 | |
| | | 220-230 (CE) | 823-900 | 3.7-3.9 | CEE 7/7 Schuko | |
| GRS-18-H | 18" x 2.385" (457 x 61 mm) Legs: 1" (25 mm) | 120 | 225 | 1.9 | NEMA 5-15P | 16 lbs (8 kg) |
| | | 220 | 206 | 0.9 | CEE 7/7 Schuko | |
| | | 240 | 245 | 1.0 | BS-1363 | |
| | | 220-230 (CE) | 206-225 | 0.9-1.0 | CEE 7/7 Schuko | |
| GRS-24-H | 24" x 2.385" (610 x 61 mm) Legs: 1" (25 mm) | 120 | 300 | 2.5 | NEMA 5-15P | 18 lbs (9 kg) |
| | | 220 | 274 | 1.2 | CEE 7/7 Schuko | |
| | | 240 | 327 | 1.4 | BS-1363 | |
| | | 220-230 (CE) | 274-300 | 1.2-1.3 | CEE 7/7 Schuko | |
| GRS-30-H | 30" x 2.385" (762 x 61 mm) Legs: 1" (25 mm) | 120 | 375 | 3.1 | NEMA 5-15P | 21 lbs (10 kg) |
| | | 220 | 343 | 1.6 | CEE 7/7 Schuko | |
| | | 240 | 408 | 1.7 | BS-1363 | |
| | | 220-230 (CE) | 343-375 | 1.6 | CEE 7/7 Schuko | |
| GRS-36-H | 36" x 5.38" (914 x 137 mm) Legs: 4" (102 mm) | 120 | 450 | 3.8 | NEMA 5-15P | 27 lbs (13 kg) |
| | | 220 | 412 | 1.9 | CEE 7/7 Schuko | |
| | | 240 | 490 | 2.0 | BS-1363 | |
| | | 220-230 (CE) | 412-450 | 1.9-2.0 | CEE 7/7 Schuko | |
| GRS-42-H | 42" x 5.38" (1067 x 137 mm) Legs: 4" (102 mm) | 120 | 525 | 4.4 | NEMA 5-15P | 32 lbs (15 kg) |
| | | 220 | 480 | 2.2 | CEE 7/7 Schuko | |
| | | 240 | 572 | 2.4 | BS-1363 | |
| | | 220-230 (CE) | 480-525 | 2.2-2.3 | CEE 7/7 Schuko | |
| GRS-48-H | 48" x 5.38" (1219 x 137 mm) Legs: 4" (102 mm) | 120 | 600 | 5.0 | NEMA 5-15P | 35 lbs (16 kg) |
| | | 220 | 549 | 2.5 | CEE 7/7 Schuko | |
| | | 240 | 653 | 2.7 | BS-1363 | |
| | | 220-230 (CE) | 549-600 | 2.5-2.6 | CEE 7/7 Schuko | |
| GRS-54-H | 54" x 5.38" (1372 x 137 mm) Legs: 4" (102 mm) | 120 | 675 | 5.6 | NEMA 5-15P | 40 lbs (19 kg) |
| | | 220 | 618 | 2.8 | CEE 7/7 Schuko | |
| | | 240 | 735 | 3.1 | BS-1363 | |
| | | 220-230 (CE) | 618-675 | 2.8-2.9 | CEE 7/7 Schuko | |
| GRS-60-H | 60" x 5.38" (1524 x 137 mm) Legs: 4" (102 mm) | 120 | 750 | 6.3 | NEMA 5-15P | 44 lbs (20 kg) |
| | | 220 | 686 | 3.1 | CEE 7/7 Schuko | |
| | | 240 | 817 | 3.4 | BS-1363 | |
| | | 220-230 (CE) | 686-750 | 3.1-3.3 | CEE 7/7 Schuko | |
| GRS-66-H | 66" x 5.38" (1676 x 137 mm) Legs: 4" (102 mm) | 120 | 825 | 6.9 | NEMA 5-15P | 49 lbs (23 kg) |
| | | 220 | 755 | 3.4 | CEE 7/7 Schuko | |
| | | 240 | 898 | 3.7 | BS-1363 | |
| | | 220-230 (CE) | 755-825 | 3.4-3.6 | CEE 7/7 Schuko | |
| GRS-72-H | 72" x 5.38" (1829 x 137 mm) Legs: 4" (102 mm) | 120 | 900 | 7.5 | NEMA 5-15P | 50 lbs (23 kg) |
| | | 220 | 823 | 3.7 | CEE 7/7 Schuko | |
| | | 240 | 980 | 4.1 | BS-1363 | |
| | | 220-230 (CE) | 823-900 | 3.7-3.9 | CEE 7/7 Schuko | |

| 17.5" (445 mm) DEPTH (H) | | | | | | |
|--------------------------|---|--------------------------|---------|---------|----------------|-------------------|
| Model | Dimensions W x H (height includes legs) | Voltages Single phase | Watts | Amps | Plug | Ship Weight* |
| GRS-18-H | 18" x 2.385" (457 x 61 mm) Legs: 1" (25 mm) | 120 | 225 | 1.9 | NEMA 5-15P | 16 lbs (8 kg) |
| | | 220 | 206 | 0.9 | CEE 7/7 Schuko | |
| | | 240 | 245 | 1.0 | BS-1363 | |
| | | 220-230 (CE) | 206-225 | 0.9-1.0 | CEE 7/7 Schuko | |
| GRS-24-H | 24" x 2.385" (610 x 61 mm) Legs: 1" (25 mm) | 120 | 300 | 2.5 | NEMA 5-15P | 18 lbs (9 kg) |
| | | 220 | 274 | 1.2 | CEE 7/7 Schuko | |
| | | 240 | 327 | 1.4 | BS-1363 | |
| | | 220-230 (CE) | 274-300 | 1.2-1.3 | CEE 7/7 Schuko | |
| GRS-30-H | 30" x 2.385" (762 x 61 mm) Legs: 1" (25 mm) | 120 | 375 | 3.1 | NEMA 5-15P | 21 lbs (10 kg) |
| | | 220 | 343 | 1.6 | CEE 7/7 Schuko | |
| | | 240 | 408 | 1.7 | BS-1363 | |
| | | 220-230 (CE) | 343-375 | 1.6 | CEE 7/7 Schuko | |
| GRS-36-H | 36" x 5.38" (914 x 137 mm) Legs: 4" (102 mm) | 120 | 450 | 3.8 | NEMA 5-15P | 27 lbs (13 kg) |
| | | 220 | 412 | 1.9 | CEE 7/7 Schuko | |
| | | 240 | 490 | 2.0 | BS-1363 | |
| | | 220-230 (CE) | 412-450 | 1.9-2.0 | CEE 7/7 Schuko | |
| GRS-42-H | 42" x 5.38" (1067 x 137 mm) Legs: 4" (102 mm) | 120 | 525 | 4.4 | NEMA 5-15P | 32 lbs (15 kg) |
| | | 220 | 480 | 2.2 | CEE 7/7 Schuko | |
| | | 240 | 572 | 2.4 | BS-1363 | |
| | | 220-230 (CE) | 480-525 | 2.2-2.3 | CEE 7/7 Schuko | |
| GRS-48-H | 48" x 5.38" (1219 x 137 mm) Legs: 4" (102 mm) | 120 | 600 | 5.0 | NEMA 5-15P | 35 lbs (16 kg) |
| | | 220 | 549 | 2.5 | CEE 7/7 Schuko | |
| | | 240 | 653 | 2.7 | BS-1363 | |
| | | 220-230 (CE) | 549-600 | 2.5-2.6 | CEE 7/7 Schuko | |
| GRS-54-H | 54" x 5.38" (1372 x 137 mm) Legs: 4" (102 mm) | 120 | 675 | 5.6 | NEMA 5-15P | 40 lbs (19 kg) |
| | | 220 | 618 | 2.8 | CEE 7/7 Schuko | |
| | | 240 | 735 | 3.1 | BS-1363 | |
| | | 220-230 (CE) | 618-675 | 2.8-2.9 | CEE 7/7 Schuko | |
| GRS-60-H | 60" x 5.38" (1524 x 137 mm) Legs: 4" (102 mm) | 120 | 750 | 6.3 | NEMA 5-15P | 44 lbs (20 kg) |
| | | 220 | 686 | 3.1 | CEE 7/7 Schuko | |
| | | 240 | 817 | 3.4 | BS-1363 | |
| | | 220-230 (CE) | 686-750 | 3.1-3.3 | CEE 7/7 Schuko | |
| GRS-66-H | 66" x 5.38" (1676 x 137 mm) Legs: 4" (102 mm) | 120 | 825 | 6.9 | NEMA 5-15P | 49 lbs (23 kg) |
| | | 220 | 755 | 3.4 | CEE 7/7 Schuko | |
| | | 240 | 898 | 3.7 | BS-1363 | |
| | | 220-230 (CE) | 755-825 | 3.4-3.6 | CEE 7/7 Schuko | |
| GRS-72-H | 72" x 5.38" (1829 x 137 mm) Legs: 4" (102 mm) | 120 | 900 | 7.5 | NEMA 5-15P | 50 lbs (23 kg) |
| | | 220 | 823 | 3.7 | CEE 7/7 Schuko | |
| | | 240 | 980 | 4.1 | BS-1363 | |
| | | 220-230 (CE) | 823-900 | 3.7-3.9 | CEE 7/7 Schuko | |

† NSF requires units 36" (914 mm) and over in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.
* Shipping weight includes packaging.



Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72 (all depths)

SPECIFICATIONS Glo-Ray® Heated Shelves

The shaded areas contain electrical information for International models

| 21.5" (546 mm) DEPTH (J) | | | | | | |
|--------------------------|---|--------------------------|-----------|---------|----------------|-------------------|
| Model | Dimensions W x H (height includes legs) | Voltages Single Phase | Watts | Amps | Plug | Ship Weight* |
| GRS-18-J | 18" x 2.385" (457 x 61 mm) Legs: 1" (25 mm) | 120 | 300 | 2.5 | NEMA 5-15P | 19 lbs (9 kg) |
| | | 220 | 274 | 1.2 | CEE 7/7 Schuko | |
| | | 240 | 327 | 1.4 | BS-1363 | |
| | | 220-230 (CE) | 274-300 | 1.2-1.3 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 300-327 | 1.3-1.4 | BS-1363 | |
| GRS-24-J | 24" x 2.385" (610 x 61 mm) Legs: 1" (25 mm) | 120 | 375 | 3.1 | NEMA 5-15P | 24 lbs (11 kg) |
| | | 220 | 343 | 1.6 | CEE 7/7 Schuko | |
| | | 240 | 408 | 1.7 | BS-1363 | |
| | | 220-230 (CE) | 343-375 | 1.6 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 375-408 | 1.6-1.7 | BS-1363 | |
| GRS-30-J | 30" x 2.385" (762 x 61 mm) Legs: 1" (25 mm) | 120 | 450 | 3.8 | NEMA 5-15P | 30 lbs (14 kg) |
| | | 220 | 412 | 1.9 | CEE 7/7 Schuko | |
| | | 240 | 490 | 2.0 | BS-1363 | |
| | | 220-230 (CE) | 412-450 | 1.9-2.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 450-490 | 2.0 | BS-1363 | |
| GRS-36-J* | 36" x 5.38" (914 x 137 mm) Legs: 4" (102 mm) | 120 | 525 | 4.4 | NEMA 5-15P | 33 lbs (15 kg) |
| | | 220 | 480 | 2.2 | CEE 7/7 Schuko | |
| | | 240 | 572 | 2.4 | BS-1363 | |
| | | 220-230 (CE) | 480-525 | 2.2-2.3 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 525-572 | 2.3-2.4 | BS-1363 | |
| GRS-42-J* | 42" x 5.38" (1067 x 137 mm) Legs: 4" (102 mm) | 120 | 675 | 5.6 | NEMA 5-15P | 39 lbs (18 kg) |
| | | 220 | 618 | 2.8 | CEE 7/7 Schuko | |
| | | 240 | 735 | 3.1 | BS-1363 | |
| | | 220-230 (CE) | 618-675 | 2.8-2.9 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 675-735 | 2.9-3.1 | BS-1363 | |
| GRS-48-J* | 48" x 5.38" (1219 x 137 mm) Legs: 4" (102 mm) | 120 | 750 | 6.3 | NEMA 5-15P | 45 lbs (21 kg) |
| | | 220 | 686 | 3.1 | CEE 7/7 Schuko | |
| | | 240 | 817 | 3.4 | BS-1363 | |
| | | 220-230 (CE) | 686-750 | 3.1-3.3 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 750-817 | 3.3-3.4 | BS-1363 | |
| GRS-54-J* | 54" x 5.38" (1372 x 137 mm) Legs: 4" (102 mm) | 120 | 825 | 6.9 | NEMA 5-15P | 49 lbs (23 kg) |
| | | 220 | 755 | 3.4 | CEE 7/7 Schuko | |
| | | 240 | 898 | 3.7 | BS-1363 | |
| | | 220-230 (CE) | 755-825 | 3.4-3.6 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 825-898 | 3.6-3.7 | BS-1363 | |
| GRS-60-J* | 60" x 5.38" (1524 x 137 mm) Legs: 4" (102 mm) | 120 | 900 | 7.5 | NEMA 5-15P | 53 lbs (24 kg) |
| | | 220 | 823 | 3.7 | CEE 7/7 Schuko | |
| | | 240 | 980 | 4.1 | BS-1363 | |
| | | 220-230 (CE) | 823-900 | 3.7-3.9 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 900-980 | 3.9-4.1 | BS-1363 | |
| GRS-66-J* | 66" x 5.38" (1676 x 137 mm) Legs: 4" (102 mm) | 120 | 975 | 8.1 | NEMA 5-15P | 60 lbs (28 kg) |
| | | 220 | 892 | 4.1 | CEE 7/7 Schuko | |
| | | 240 | 1062 | 4.4 | BS-1363 | |
| | | 220-230 (CE) | 892-975 | 4.1-4.2 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 975-1062 | 4.2-4.4 | BS-1363 | |
| GRS-72-J* | 72" x 5.38" (1829 x 137 mm) Legs: 4" (102 mm) | 120 | 1050 | 8.8 | NEMA 5-15P | 64 lbs (30 kg) |
| | | 220 | 961 | 4.4 | CEE 7/7 Schuko | |
| | | 240 | 1143 | 4.8 | BS-1363 | |
| | | 220-230 (CE) | 961-1050 | 4.4-4.6 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 1050-1143 | 4.6-4.8 | BS-1363 | |

| 23.5" (597 mm) DEPTH (K) | | | | | | |
|--------------------------|---|--------------------------|-----------|---------|----------------|-------------------|
| Model | Dimensions W x H (height includes legs) | Voltages Single phase | Watts | Amps | Plug | Ship Weight* |
| GRS-18-K | 18" x 2.385" (457 x 61 mm) Legs: 1" (25 mm) | 120 | 325 | 2.7 | NEMA 5-15P | 21 lbs (10 kg) |
| | | 220 | 297 | 1.4 | CEE 7/7 Schuko | |
| | | 240 | 354 | 1.5 | BS-1363 | |
| | | 220-230 (CE) | 297-325 | 1.4 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 325-354 | 1.4-1.5 | BS-1363 | |
| GRS-24-K | 24" x 2.385" (610 x 61 mm) Legs: 1" (25 mm) | 120 | 425 | 3.5 | NEMA 5-15P | 27 lbs (13 kg) |
| | | 220 | 389 | 1.8 | CEE 7/7 Schuko | |
| | | 240 | 463 | 1.9 | BS-1363 | |
| | | 220-230 (CE) | 389-425 | 1.8 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 425-463 | 1.8-1.9 | BS-1363 | |
| GRS-30-K | 30" x 2.385" (762 x 61 mm) Legs: 1" (25 mm) | 120 | 525 | 4.4 | NEMA 5-15P | 33 lbs (15 kg) |
| | | 220 | 480 | 2.2 | CEE 7/7 Schuko | |
| | | 240 | 572 | 2.4 | BS-1363 | |
| | | 220-230 (CE) | 480-525 | 2.2-2.3 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 525-572 | 2.3-2.4 | BS-1363 | |
| GRS-36-K* | 36" x 5.38" (914 x 137 mm) Legs: 4" (102 mm) | 120 | 625 | 5.2 | NEMA 5-15P | 36 lbs (17 kg) |
| | | 220 | 572 | 2.6 | CEE 7/7 Schuko | |
| | | 240 | 681 | 2.8 | BS-1363 | |
| | | 220-230 (CE) | 572-625 | 2.6-2.7 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 625-681 | 2.7-2.8 | BS-1363 | |
| GRS-42-K* | 42" x 5.38" (1067 x 137 mm) Legs: 4" (102 mm) | 120 | 750 | 6.3 | NEMA 5-15P | 43 lbs (20 kg) |
| | | 220 | 686 | 3.1 | CEE 7/7 Schuko | |
| | | 240 | 817 | 3.4 | BS-1363 | |
| | | 220-230 (CE) | 686-750 | 3.1-3.3 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 750-817 | 3.3-3.4 | BS-1363 | |
| GRS-48-K* | 48" x 5.38" (1219 x 137 mm) Legs: 4" (102 mm) | 120 | 850 | 7.1 | NEMA 5-15P | 48 lbs (22 kg) |
| | | 220 | 778 | 3.5 | CEE 7/7 Schuko | |
| | | 240 | 925 | 3.9 | BS-1363 | |
| | | 220-230 (CE) | 778-850 | 3.5-3.7 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 850-925 | 3.7-3.9 | BS-1363 | |
| GRS-54-K* | 54" x 5.38" (1372 x 137 mm) Legs: 4" (102 mm) | 120 | 950 | 7.9 | NEMA 5-15P | 52 lbs (24 kg) |
| | | 220 | 869 | 4.0 | CEE 7/7 Schuko | |
| | | 240 | 1034 | 4.3 | BS-1363 | |
| | | 220-230 (CE) | 869-950 | 4.0-4.1 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 950-1034 | 4.1-4.3 | BS-1363 | |
| GRS-60-K* | 60" x 5.38" (1524 x 137 mm) Legs: 4" (102 mm) | 120 | 1050 | 8.8 | NEMA 5-15P | 56 lbs (26 kg) |
| | | 220 | 961 | 4.4 | CEE 7/7 Schuko | |
| | | 240 | 1143 | 4.8 | BS-1363 | |
| | | 220-230 (CE) | 961-1050 | 4.4-4.6 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 1050-1143 | 4.6-4.8 | BS-1363 | |
| GRS-66-K* | 66" x 5.38" (1676 x 137 mm) Legs: 4" (102 mm) | 120 | 1150 | 9.6 | NEMA 5-15P | 68 lbs (31 kg) |
| | | 220 | 1052 | 4.8 | CEE 7/7 Schuko | |
| | | 240 | 1252 | 5.2 | BS-1363 | |
| | | 220-230 (CE) | 1052-1150 | 4.8-5.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 1150-1252 | 5.0-5.2 | BS-1363 | |
| GRS-72-K* | 72" x 5.38" (1829 x 133 mm) | 120 | 1250 | 10.4 | NEMA 5-15P | 69 lbs (32 kg) |
| | | 220 | 1144 | 5.2 | CEE 7/7 Schuko | |
| | | 240 | 1361 | 5.7 | BS-1363 | |
| | | 220-230 (CE) | 1144-1250 | 5.2-5.4 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 1250-1361 | 5.4-5.7 | BS-1363 | |

* NSF requires units 36" (914 mm) and over in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.
* Shipping weight includes packaging.



Glo-Ray® Heated Shelves

Models: GRS-18, -24, -30, -36, -42, -48, -54, -60, -66, -72 (all depths)

SPECIFICATIONS Glo-Ray® Heated Shelves

The shaded areas contain electrical information for International models


25.5" (648 mm) DEPTH (L)

| Model | Dimensions W x H (height includes legs) | Voltages Single Phase | Watts | Amps | Plug | Ship Weight* |
|-----------|---|--------------------------|-----------|---------|----------------|-------------------|
| GRS-18-L | 18" x 2.385" (457 x 61 mm) Legs: 1" (25 mm) | 120 | 350 | 2.9 | NEMA 5-15P | 22 lbs (10 kg) |
| | | 220 | 320 | 1.5 | CEE 7/7 Schuko | |
| | | 240 | 381 | 1.6 | BS-1363 | |
| | | 220-230 (CE) | 320-350 | 1.5 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 350-381 | 1.5-1.6 | BS-1363 | |
| GRS-24-L | 24" x 2.385" (610 x 61 mm) Legs: 1" (25 mm) | 120 | 475 | 4.0 | NEMA 5-15P | 26 lbs (12 kg) |
| | | 220 | 435 | 2.0 | CEE 7/7 Schuko | |
| | | 240 | 517 | 2.2 | BS-1363 | |
| | | 220-230 (CE) | 435-475 | 2.0-2.1 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 475-517 | 2.1-2.2 | BS-1363 | |
| GRS-30-L | 30" x 2.385" (762 x 61 mm) Legs: 1" (25 mm) | 120 | 600 | 5.0 | NEMA 5-15P | 33 lbs (15 kg) |
| | | 220 | 549 | 2.5 | CEE 7/7 Schuko | |
| | | 240 | 653 | 2.7 | BS-1363 | |
| | | 220-230 (CE) | 549-600 | 2.5-2.6 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 600-653 | 2.6-2.7 | BS-1363 | |
| GRS-36-L* | 36" x 5.38" (914 x 137 mm) Legs: 4" (102 mm) | 120 | 725 | 6.0 | NEMA 5-15P | 37 lbs (17 kg) |
| | | 220 | 663 | 3.0 | CEE 7/7 Schuko | |
| | | 240 | 789 | 3.3 | BS-1363 | |
| | | 220-230 (CE) | 663-725 | 3.0-3.2 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 725-789 | 3.2-3.3 | BS-1363 | |
| GRS-42-L* | 42" x 5.38" (1067 x 137 mm) Legs: 4" (102 mm) | 120 | 825 | 6.9 | NEMA 5-15P | 43 lbs (20 kg) |
| | | 220 | 755 | 3.4 | CEE 7/7 Schuko | |
| | | 240 | 898 | 3.7 | BS-1363 | |
| | | 220-230 (CE) | 755-825 | 3.4-3.6 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 825-898 | 3.6-3.7 | BS-1363 | |
| GRS-48-L* | 48" x 5.38" (1219 x 137 mm) Legs: 4" (102 mm) | 120 | 950 | 7.9 | NEMA 5-15P | 50 lbs (23 kg) |
| | | 220 | 869 | 4.0 | CEE 7/7 Schuko | |
| | | 240 | 1034 | 4.3 | BS-1363 | |
| | | 220-230 (CE) | 869-950 | 4.0-4.1 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 950-1034 | 4.1-4.3 | BS-1363 | |
| GRS-54-L* | 54" x 5.38" (1372 x 137 mm) Legs: 4" (102 mm) | 120 | 1075 | 9.0 | NEMA 5-15P | 58 lbs (27 kg) |
| | | 220 | 984 | 4.5 | CEE 7/7 Schuko | |
| | | 240 | 1171 | 4.9 | BS-1363 | |
| | | 220-230 (CE) | 984-1075 | 4.5-4.7 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 1075-1171 | 4.7-4.9 | BS-1363 | |
| GRS-60-L* | 60" x 5.38" (1524 x 137 mm) Legs: 4" (102 mm) | 120 | 1200 | 10.0 | NEMA 5-15P | 60 lbs (28 kg) |
| | | 220 | 1098 | 5.0 | CEE 7/7 Schuko | |
| | | 240 | 1307 | 5.4 | BS-1363 | |
| | | 220-230 (CE) | 1098-1200 | 5.0-5.2 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 1200-1307 | 5.2-5.4 | BS-1363 | |
| GRS-66-L* | 66" x 5.38" (1676 x 137 mm) Legs: 4" (102 mm) | 120 | 1325 | 11.0 | NEMA 5-15P | 65 lbs (30 kg) |
| | | 220 | 1212 | 5.5 | CEE 7/7 Schuko | |
| | | 240 | 1443 | 6.0 | BS-1363 | |
| | | 220-230 (CE) | 1212-1325 | 5.5-5.8 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 1325-1443 | 5.8-6.0 | BS-1363 | |
| GRS-72-L* | 72" x 5.38" (1829 x 137 mm) Legs: 4" (102 mm) | 120 | 1450 | 12.0 | NEMA 5-15P | 69 lbs (32 kg) |
| | | 220 | 1327 | 6.0 | CEE 7/7 Schuko | |
| | | 240 | 1579 | 6.6 | BS-1363 | |
| | | 220-230 (CE) | 1327-1450 | 6.0-6.3 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 1450-1579 | 6.3-6.6 | BS-1363 | |

CORD LOCATION

Center of side with controls.

PLUG CONFIGURATIONS

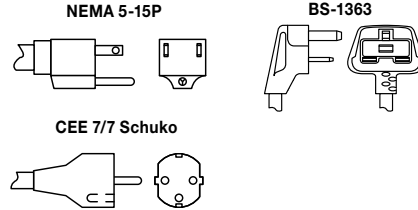

♦ NSF requires units 36" (914 mm) and over in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.

† Shipping weight includes packaging.