

# VITO XM

## Spec sheet



### Functionality:


VITO XM cleans your oil in a simple and hygienic way. VITO extracts the oil from the fryer, filters out solid particles, and stores it in its 100l tank.

From there, it can be safely transported. The oil can then either be pumped back into the fryer or disposed of.

VITO is equipped with VITOconnect, which provides you with an online overview of productivity, services, and updates.

### Features:

- ▲ Operating temperature up to 200 °C
- ▲ Vacuum filtration
- ▲ Automatic off - VITO has built-in oillevel sensor
- ▲ Automatic safety off - filtration/return after 5min; heater after 30min
- ▲ Integrated heater (for solid fat additional system heater recommended)
- ▲ VITO made out of stainless steel (1.4301) and other food safe materials
- ▲ Hose can be removed by quick connector
- ▲ Filter basket and lance holder are dishwasher safe
- ▲ Lockable castors
- ▲ Network connection (WiFi)

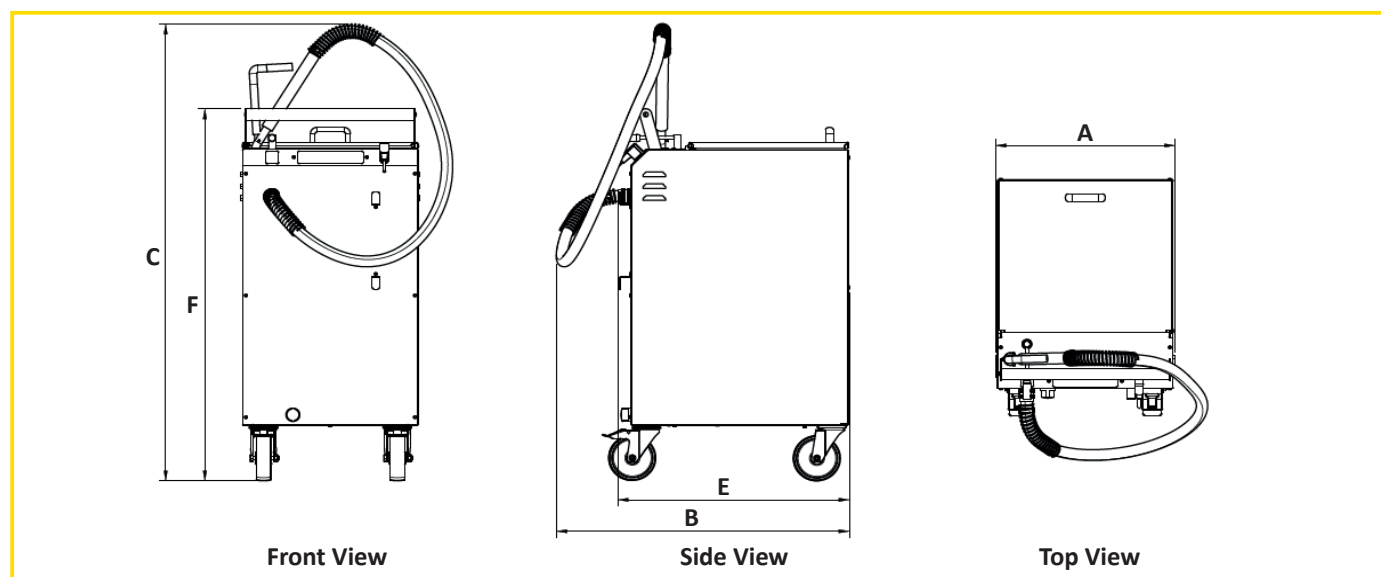

### VITO XM technical Data:

|                  | Width A                          | Depth B           | Height C        |                        |            | Depth E                      | Height F  | Hose length  |
|------------------|----------------------------------|-------------------|-----------------|------------------------|------------|------------------------------|-----------|--------------|
|                  | 480 mm                           | 786 to 876 mm     | 1255 to 1265 mm |                        |            | 622 mm                       | 1031 mm   | 1500 mm      |
| Filtration power | Filtration efficiency            | Particle capacity | Pumping power   | Heating power          | Max. power | Power connection             | Frequency | Fuses inside |
| up to 30 l/min   | 5 µm effective/<br>20 µm nominal | 10 l/10,7 kg*     | 35 l/min        | 110 W                  | 1200 W     | 220 - 240 V,<br>single phase | 50-60 Hz  | 4 AT & 8 AT  |
| Protection       | Tank                             | Weight            | Temperature     | Material               | WiFi       |                              |           |              |
| SK1 (PE)         | 100 l                            | 65 kg             | max. 200 °C     | Stainless steel 1.4301 | 2.4 GHz    |                              |           |              |

\*regular break crumbs

### Accessories:

- ▲ Additional system heater for solid fat (130 W)
- ▲ Various particle filters