

Glo-Ray 2-Go™ Heated Shelves

Models: GRS2G-3920-2, -3, -4, -5

The Hatco Glo-Ray 2-Go[™] Heated Shelves are designed specifically for your delivery and carry-out needs in mind. Capable of holding a great quantity of hot food items at optimum serving temperatures, the GRS2G models hold bags and boxes up to 30 minutes with a high temperature range of up to 93°C.

Standard features

- A great solution to handling pick-up, third-party delivery or any food to-go situation
- Shelves are 508 mm deep and 991 mm wide, large enough for pizza boxes and bags, which will easily fit into the 330 mm clearance of each shelf
- Touchscreen control with digital read out indicates separate heat and timer for each shelf
- Standard units feature shelves with heated bases that are thermostatically-controlled and have a stainless steel frame
- The cord is recessed into the bottom shelf at a 45° angle, allowing the unit to be flush against either wall



- Optional side and back panels are one panel per shelf, giving you the flexibility to customize your unit. Keep some off for passthrough capabilities and leave some on for single-sided access
- Place in a wall opening for a built-in feel, and benefit from the pass-through features
- Unit comes with side wall anchor brackets for improved stability, 152 mm adjustable flanged feet that can be bolted to the floor and a 1829 mm recessed cord and plug



Options (available at time of purchase only)

Designer Colors

 Non-standard colors are non-returnable – Stainless Steel standard –

 Warm Red
 Black
 Gray Granite
 White Granite

 Navy Blue
 Hunter Green
 Antique Copper

 \Box Controls and permanent panel on customers right side

Side panels – w	vill be same co	lor as unit –						
□2-shelf	□3-shelf	□4-shelf	□5-shelf					
Back panels – will be same color as unit –								
□2-shelf	□3-shelf	□4-shelf	□5-shelf					

Accessories

4" (102 mm) Adjustable Legs

(GRS3G-3920-2 and GRS2G-3920-3 models only)

IFS anti-microbial coatings use naturally-occurring, environmentally sustainable, silver ions to help inhibit the growth of microbes on the powder coated surface. See www.hatcocorp.com/antimicrobial-paint for more information.










Glo-Ray 2-Go[™] Heated Shelves Models: GRS2G-3920-2, -3, -4, -5



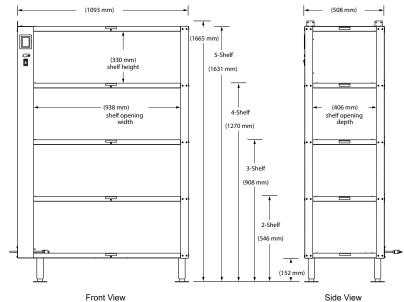

SPECIFICATIONS Glo-Ray 2-Go[™] Heated Shelves

Model	Description	Dimensions (W x D x H [•])	Volts	Watts	Amps	Ship Weight*
GRS2G-3920-2	2 shelves	(1093 x 508 x 546 mm)	240	766	3.2	69 kg
GRS2G-3920-3	3 shelves	(1093 x 508 x 908 mm)	240	1148	4.8	80 kg
GRS2G-3920-4	4 shelves	(1093 x 508 x 1270 mm)	240	1529	6.4	91 kg
GRS2G-3920-5	5 shelves	(1093 x 508 x 1631 mm)	240	1912	8.0	103 kg

• Height does not include 1.35" side wall mounting brackets. * Ship weight includes packaging.

CORD LOCATION

Server side, bottom corner - is an 45° recessed cord.

PRODUCT SPECS Glo-Ray 2-Go[™] Heated Shelves

The Heated Shelves shall be a Glo-Ray 2-Go™ Model ... , rated at ... volts, and ... watts, by the Hatco Corporation, Milwaukee, WI 53234 U.S.A. The shelves shall consist of thermostatically-controlled heated base, touchscreen controls with separate heat and timer for each shelf and a 6' (1829 mm) recessed

cord with plug attached. Accessories shall include side and back panels.

