



Glo-Ray 2-Go® Heated Shelves

Models: GRS2G-3920-2, -3, -4, -5

The Hatco Glo-Ray 2-Go® Heated Shelves are designed specifically for your delivery and carry-out needs in mind. Capable of holding a great quantity of hot food items at optimum serving temperatures, the GRS2G models hold bags and boxes up to 30 minutes with a high temperature range of up to 200°F (93°C).

Standard features

- A great solution to handling pick-up, third-party delivery or any food to-go situation
- Shelves are 20" (508 mm) deep and 39" (991 mm) wide, large enough for pizza boxes and bags, which will easily fit into the 13" (330 mm) clearance of each shelf
- Touchscreen control with digital read out indicates separate heat and timer for each shelf
- Standard units feature shelves with heated bases that are thermostatically-controlled and have a stainless steel frame
- The cord is recessed into the bottom shelf at a 45° angle, allowing the unit to be flush against either wall
- Optional side and back panels are one panel per shelf, giving you the flexibility to customize your unit. Keep some off for pass-through capabilities and leave some on for single-sided access
- Place in a wall opening for a built-in feel, and benefit from the pass-through features
- Unit comes with side wall anchor brackets for improved stability, 6" (152 mm) adjustable flanged feet that can be bolted to the floor and a 6' (1829 mm) recessed cord and plug



Project _____

Item # _____

Quantity _____



Options (available at time of purchase only)

Designer Colors[■] –

- Non-standard colors are non-returnable – Stainless Steel standard –
- Warm Red Black Gray Granite White Granite
 - Navy Blue Hunter Green Antique Copper

Controls and permanent panel on customers right side

Side panels – will be same color as unit –

- 2-shelf 3-shelf 4-shelf 5-shelf

Back panels – will be same color as unit –

- 2-shelf 3-shelf 4-shelf 5-shelf

One (1) 4" (102 mm) Adjustable Flanged Foot (GRS2G-3920-2 and GRS2G-3920-3 models only) – Contact Service Parts

[■] IFS anti-microbial coatings use naturally-occurring, environmentally sustainable, silver ions to help inhibit the growth of microbes on the powder coated surface. See www.hatcocorp.com/antimicrobial-paint for more information.


For operation, location and safety information, please refer to the Installation and Operating Manual.





Glo-Ray 2-Go® Heated Shelves

Models: GRS2G-3920-2, -3, -4, -5

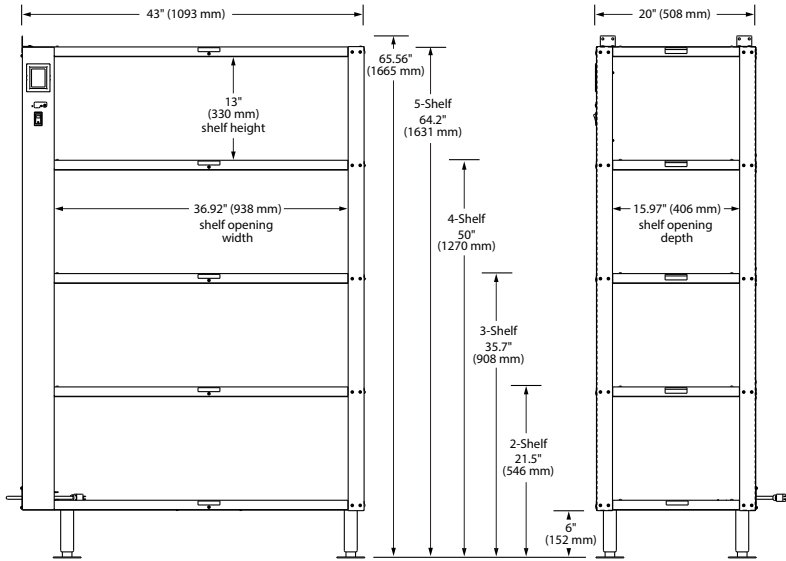

Front View

Side View

SPECIFICATIONS Glo-Ray 2-Go® Heated Shelves

The shaded areas contain electrical information for international models

Model	Description	Dimensions (W x D x H [†])	Volts	Watts	Amps	Plug	Approx. Ship Weight
GRS2G-3920-2	2 shelves	43" x 20" x 21.5" (1093 x 508 x 546 mm)	120	704	5.6	NEMA 5-15P	150 lbs. (69 kg)
			220	644	2.9	BS-1363, CEE 7/7 Schuko	
			230	704	3.1	BS-1363, CEE 7/7 Schuko	
			240	766	3.2	BS-1363, AS-3112, CEE 7/7 Schuko	
GRS2G-3920-3	3 shelves	43" x 20" x 35.7" (1093 x 508 x 908 mm)	120	1055	8.8	NEMA 5-15P	175 lbs. (80 kg)
			220	965	4.4	BS-1363, CEE 7/7 Schuko	
			230	1055	4.6	BS-1363, CEE 7/7 Schuko	
			240	1148	4.8	BS-1363, AS-3112, CEE 7/7 Schuko	
GRS2G-3920-4	4 shelves	43" x 20" x 50" (1093 x 508 x 1270 mm)	120	1406	11.7	NEMA 5-15P	200 lbs. (91 kg)
			220	1285	5.8	BS-1363, CEE 7/7 Schuko	
			230	1406	6.1	BS-1363, CEE 7/7 Schuko	
			240	1529	6.4	BS-1363, AS-3112, CEE 7/7 Schuko	
GRS2G-3920-5	5 shelves	43" x 20" x 64.2" (1093 x 508 x 1631 mm)	120	1757	14.6	NEMA 5-15P*	225 lbs. (103 kg)
			220	1607	7.3	BS-1363, CEE 7/7 Schuko	
			230	1757	7.6	BS-1363, CEE 7/7 Schuko	
			240	1912	8.0	BS-1363, AS-3112, CEE 7/7 Schuko	

† Height does not include 1.35" side wall mounting brackets.


*Canadian models use NEMA 5-20P.

CORD LOCATION


Server side, bottom corner - is an 45° recessed cord.

PLUG CONFIGURATIONS


NEMA 5-15P




NEMA 5-20P



BS-1363



AS 3112



CEE 7/7 Schuko

